



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) **EP 1 026 671 A1**

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
09.08.2000 Bulletin 2000/32

(51) Int Cl.7: **G11B 7/00, G11B 7/125**

(21) Application number: **99112502.2**

(22) Date of filing: **01.07.1999**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE**  
Designated Extension States:  
**AL LT LV MK RO SI**

(30) Priority: **02.02.1999 JP 2460899**

(60) Divisional application: **00107642.1  
00107643.9  
00107641.3**

(71) Applicant: **MATSUSHITA ELECTRIC INDUSTRIAL  
CO., LTD.**  
**Kadoma-shi, Osaka-fu, 571 (JP)**

(72) Inventors:  
• **Akiyama, Tetsuya**  
**Hirakata-shi, Osaka 573-0084 (JP)**  
• **Nishiuchi, Kenichi**  
**Hirakata-shi, Osaka 573-1135 (JP)**  
• **Furukawa, Shigeaki**  
**Kadoma-shi, Osaka 571-0026 (JP)**  
• **Narumi, Kenji**  
**Ibaraki-shi, Osaka 567-0882 (JP)**  
• **Yamaguchi, Hiroyuki**  
**Nishinomiya-shi, Hyogo 669-1146 (JP)**

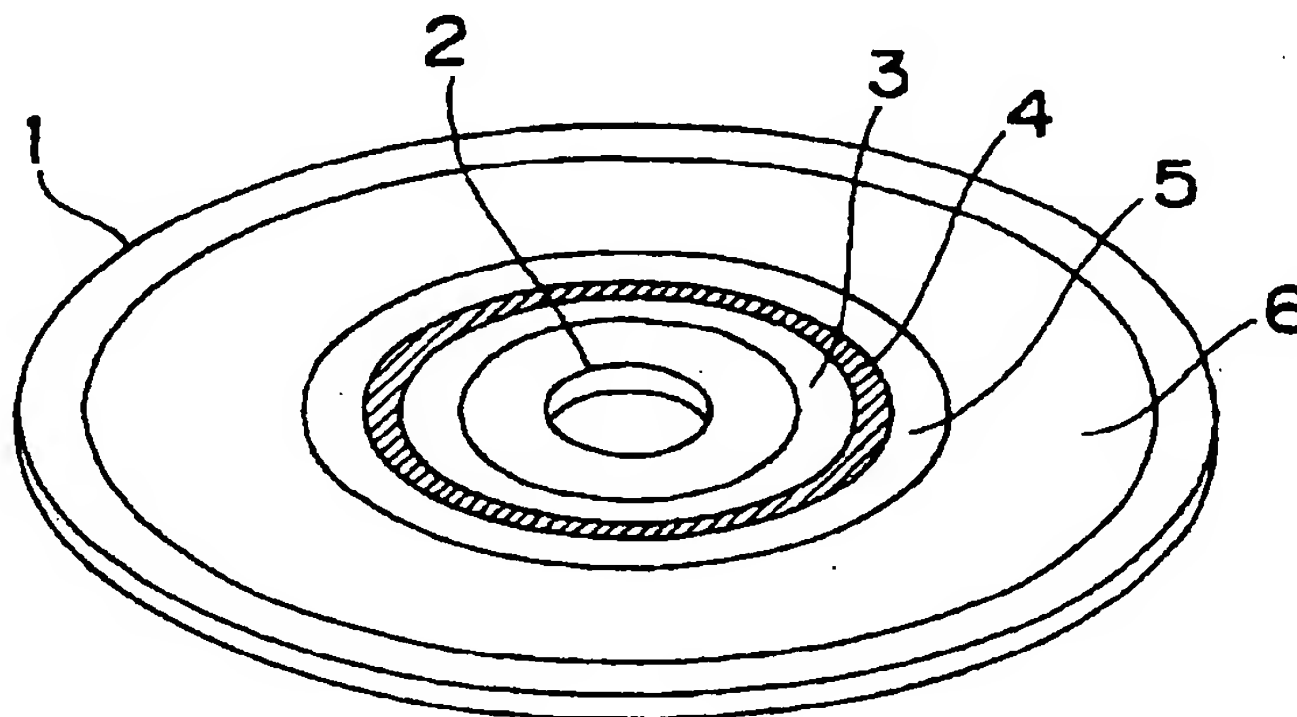
(74) Representative: **Eisenführ, Speiser & Partner**  
**Martinistrasse 24**  
**28195 Bremen (DE)**

### (54) **Optical recording medium and recording/reproduction method and apparatus therefor**

(57) An optical recording medium has a recording/reproduction conditions recording area for recording recording/reproduction conditions and recording/reproduction apparatus information identifying the recording/reproduction apparatus using the recording/reproduction conditions. When the optical recording medium is accessed in a recording/reproduction apparatus, the recording/reproduction conditions for the recording/repro-

duction apparatus are used. Therefore, recording or reproduction can be performed with use of optimum recording/reproduction apparatus appropriate for the optical recording medium and for the recording/reproduction apparatus. When the optical recording medium is used for the first time, test recording is performed by using a test recording region provided in the optical recording medium, and the obtained recording/reproduction conditions are recorded.

*Fig. 1*



EP 1 026 671 A1

## Description

### TECHNICAL FIELD

**[0001]** The present invention relates to an optical recording medium, a recording/reproduction method and a recording/reproduction apparatus for recording and reproducing information by using radiation of a laser beam or the like.

### BACKGROUND ART

**[0002]** An optical recording medium has attracted attention as a memory having large capacity and high density. A rewritable optical recording medium called as erasable type have been developed. One of the erasable optical recording media has a recording layer made of a thin film which changes the phase between amorphous and crystalline states, and information is recorded and erased by thermal energy due to the laser beam radiation. An alloy film composed of Ge, Sb, Te, In etc. as main components, for example, GeSbTe film, is known as the phase-change material for the recording layer. In many cases, information is recorded by forming marks by partially changing the recording layer to amorphous state while information is erased by crystallization of the amorphous marks. The amorphous state is achieved by radiating a strong laser beam in pulses to heat the recording layer to a temperature not lower than the melting point thereof, and then cooling it at a predetermined or faster rate. The crystallization, on the other hand, is achieved by radiating a comparatively weak laser beam to heat the recording layer to a temperature between the crystallization temperature and the melting point.

**[0003]** Information is recorded in a medium by PWM recording, in which information is represented by mark lengths and space lengths (i.e. edge positions of the front and rear ends of the mark) by forming marks of different lengths with various space sections.

**[0004]** However, in PWM recording, if a strong laser pulse simply equivalent to the mark length is radiated for forming a long mark, the heat generated in the front portion of the mark enhances the temperature increase at the rear portion. Thus, the mark is distorted to have the narrow front portion and the wide rear portion thereof, to deteriorate signal quality. Therefore, as shown in Fig. 4, it is more advantageous to form a mark by using a plurality of laser pulses including the first pulse corresponding to the front end of the mark, intermediate pulses corresponding to the intermediate portion thereof and the last pulse corresponding to the rear end thereof.

**[0005]** Even in this method, however, when an interval between marks is decreased as a result of an increased recording density, the heat generated at the forming of a mark affects the formation of adjacent marks. This leads to a problem that variation of the edge positions of the marks deteriorates the signal quality. The varia-

tion of the edge position due to the thermal interference between marks depends on the length of the mark to be recorded and the length of the space sections before and after the mark. In order to solve this problem, Japanese Patent laid open Publication 7-129,959/1995 proposes a signal pattern adaptive recording compensation scheme in which the generation timings "a" and "b" of the first and last pulses in Fig. 4 are changed according to the length of the mark and the length of the space sections before and after the mark.

**[0006]** The optimum pulse conditions, however, depend to a larger measure on the characteristics of the medium and the recording/reproduction apparatus. Similarly, optimum servo conditions, such as focal and tracking positions and a gain for determining various servo operations on recording and reproduction, and optimum reproduction signal processing conditions, such as equalizing characteristics and a binarization slice level, are also dependent much on the characteristics of the medium and the recording/reproduction apparatus.

**[0007]** Therefore, each time a recording/reproduction apparatus is activated for recording with an optical recording medium mounted therein, test recording is carried out while changing recording/reproduction conditions such as the pulse conditions, the servo conditions and/or the reproduction signal processing conditions. Then, the quality of the reproduced signals with the measurement is compared to determine the optimum recording/reproduction conditions, and the recording of information is performed based on the optimum recording/reproduction conditions. Then, it is a problem that the action called as learning for determining the optimum recording/reproduction conditions is always required on activation to make a waiting time longer.

### DISCLOSURE OF THE INVENTION

**[0008]** A main object of the present invention is to provide an optical recording medium, a recording/reproduction method and a recording/reproduction apparatus therefor which solves these problems.

**[0009]** The above object is solved by the combinations of the characteristics described in the main claims, and the subclaims define further advantageous embodiments of the invention.

**[0010]** In one aspect of the invention, an optical recording medium for recording the information by forming a mark with laser pulses radiated thereon, comprises an information recording area provided for recording the information, and a recording/reproduction conditions recording area, to which recording by a recording/reproduction apparatus is possible, provided for recording recording/reproduction conditions representing setting values for the recording/reproduction apparatus for recording or reproducing information. Preferably, the recording/reproduction conditions recording area has a capacity enough to record a plurality of sets of the re-

recording/reproduction conditions. Preferably, the recording/reproduction conditions recording area is further used for recording apparatus information for identifying the recording/reproduction apparatus which uses the recording/reproduction conditions. Preferably, the optical recording medium further comprises a test recording area provided for test recording of a specified signal to measure a quality of reproduced signal. The recording/reproduction conditions recording area and the test recording area is preferably interposed between the lead-in area and a region for recording the information.

**[0011]** In a second aspect of the invention of recording/reproduction method for recording/reproducing information by using marks formed with radiation of laser pulses on an optical recording medium, wherein lengths of the marks and those of space sections before and after the marks represent the information, recording/reproduction conditions are read from a recording/reproduction conditions recording area in the medium, to which recording by a recording/reproduction apparatus is possible. Then, information is recorded or reproduced based on the recording/reproduction conditions, wherein a plurality of pulses are radiated from a front end to a rear end of a mark when the mark is formed.

**[0012]** In a third aspect of the invention of a recording/reproduction method for recording/reproducing information, recording/reproduction apparatus information for identifying a recording/reproduction apparatus which uses the recording/reproduction conditions are read from a recording/reproduction conditions recording area in the optical recording medium, besides the recording/reproduction conditions. Then, information is recorded or reproduced based on the recording/reproduction conditions accompanying the recording/reproduction apparatus information coinciding with the recording/reproduction apparatus to be used, wherein a plurality of pulses are radiated from a front end to a rear end of a mark when the mark is formed.

**[0013]** Preferably, in the above-mentioned two recording/reproduction methods, test recording is performed to determine optimum recording/reproduction conditions for a recording/reproduction apparatus by changing recording/reproduction conditions, and the obtained result is recorded in the recording region in the optical recording medium. Thereafter, recording or reproduction is performed based on the recording/reproduction conditions read from the recording region.

**[0014]** In a fourth aspect of the invention, an optical recording/reproduction apparatus records and reproduces information with marks formed with radiation of laser pulses on an optical recording medium, wherein lengths of the marks and those of space sections before and after the marks represent the information. In the apparatus, a spindle motor rotates the optical recording medium. An optical head radiates a laser pulse with a laser diode onto the optical recording medium, a servo circuit drives the optical head, and a laser driver drives the laser diode according to pulse signals for recording

information. A pulse controller generates pulses for driving the laser driver, wherein a plurality of pulses are generated to radiate from a front end to a rear end of the mark to record the information. An equalizer corrects frequency characteristic of reproduction signal, and a binarizing circuit converts the corrected reproduction signal to a binarized signal. Further, the apparatus comprises a storage device for storing recording/reproduction conditions read from a recording area provided for storing recording/reproduction conditions in the optical recording medium, and at least one of first setting means for setting pulse conditions for the pulse controller in accordance with the recording/reproduction conditions, second setting means for setting servo conditions for the servo circuit, third setting means for setting equalizing conditions of reproduction signal to the equalizer and fourth setting means for setting a binarization slice level to the binarizing circuit.

**[0015]** This disclosure of the invention does not necessarily describe all necessary features so that the invention may also be a sub-combination of these described features.

**[0016]** An advantage of the present invention is that shorten a time required for the learning and realize a short activation time.

#### BRIEF DESCRIPTION OF DRAWINGS

**[0017]** These and other objects and features of the present invention will become clear from the following description taken in conjunction with the preferred embodiments thereof with reference to the accompanying drawings, and in which:

- Fig. 1 is a diagram of an optical recording medium according to an embodiment of the present invention;
- Fig. 2 is a diagram of an optical recording medium according to another embodiment of the present invention;
- Fig. 3 is a diagram of a recording/reproduction apparatus for an optical recording medium;
- Fig. 4 is a diagram for explaining a shape of a mark and pulse conditions for forming the mark;
- Fig. 5 is a flowchart of a first recording/reproduction method for an optical recording medium according to the invention;
- Fig. 6 is a flowchart of recording;
- Fig. 7 is a flowchart of learning;
- Fig. 8 is a flowchart of a second recording/reproduction method for an optical recording medium according to the invention;
- Fig. 9 is a flowchart of a third recording/reproduction method for an optical recording medium according to the invention;
- Fig. 10 is a flowchart of a fourth recording/reproduction method for an optical recording medium according to the invention;

Fig. 11 is a flowchart of a fifth recording/reproduction method for an optical recording medium according to the invention; and

Fig. 12 is a flowchart of a sixth recording/reproduction method for an optical recording medium according to the invention.

#### BEST MODE FOR CARRYING OUT THE INVENTION

[0018] Referring now to the drawings, wherein like reference characters designate like or corresponding parts throughout the several views, embodiments of an optical recording medium, and a recording/reproduction method and a recording/reproduction apparatus therefor according to the invention will be explained below.

[0019] Fig. 1 shows an optical recording medium according to a first embodiment of the invention. The optical recording medium 1 has a central hole 2 for setting it to a recording/reproduction apparatus. The substrate is formed with a guide groove (Fig. 4) for tracking a laser beam on recording or reproduction. The optical recording medium 1 has a transparent substrate made of polycarbonate of 0.6 mm thickness and a recording layer formed thereon. The recording layer is made of a GeSbTe alloy as a phase-change recording material. By radiation of a laser beam thereon, the recording layer is partially converted into amorphous state thereby to form a recording mark. Marks of different lengths with various space sections are formed according to the PWM recording scheme in which information is represented by lengths of a mark and adjacent space sections.

[0020] The recording medium 1 has a lead-in area 3 recording medium identification information for a medium or the like with embossed pits (not shown) for the address information and the like exclusive for reproduction. The recording medium 1 further comprises three recording areas 4-6 to which recording is possible by the recording/reproduction apparatus. The recording/reproduction conditions recording area 4 is provided for recording recording/reproduction conditions such as pulse conditions, servo conditions, reproduction signal processing conditions and the like. The test recording area 5 is provided for test recording of specified data in order to measure the signal quality thereof. The information recording area 6 is used for recording information. The recording area 4 for recording/reproduction conditions and the test recording area 5 are preferably arranged between the lead-in area 3 and the information recording area 6. When information is recorded in the recording medium according to the invention, the lead-in area 3 is first accessed. Then, recording/reproduction conditions recorded in the recording area 4 are read out, and based on the recording/reproduction conditions, conditions such as pulse conditions, servo conditions and reproduction signal processing conditions are set. If necessary, the test recording area 5 is used for test recording. That is, specified data are recorded as a test therein, and the quality of the signals reproduced on the

recorded data for test is checked. Information is recorded in the information recording area 6. Because the areas 3-6 are arranged in the manner described above, the distance covered by the optical head on recording is minimized for a shorter access time. Either the recording/reproduction conditions recording area 4 or the test recording area 5 may be arranged on an inner peripheral side.

[0021] When a recording medium having the configuration described above is used for the first time, the test recording is conducted while changing the recording/reproduction conditions in a recording/reproduction apparatus, and the measured quality of the signal reproduced therefrom is compared to determine optimum recording/reproduction conditions. The determined conditions are recorded in the recording area 4. When the recording medium 1 is used thereafter, the recording/reproduction conditions recorded in the recording area 4 can be read. Then, the learning for determining the optimum recording/reproduction conditions when the medium is accessed can be omitted or shortened. In this way, when the medium is mounted and the recording/reproduction apparatus is activated, the waiting time can be shortened.

[0022] Alternatively, in the learning, a simple method can be employed. The test recording is conducted while changing the recording/reproduction conditions. A result of a measurement of the quality of the signal reproduced is compared with a predetermined condition, and as soon as the result satisfies the predetermined condition, the recording/reproduction conditions obtained at the measurement are adopted as the optimum recording/reproduction conditions.

[0023] It is preferable that the recording area 4 provided for recording/reproduction conditions is composed of a plurality of sub-areas for recording the same information. Fig. 2 shows an optical recording medium according to a second embodiment, which is similar to that of the first embodiment except the recording area 4. The recording area 4 is composed of two sub-areas including a first recording sub-area 4a and a second one 4b. The first and second sub-areas 4a and 4b are provided for recording the same recording/reproduction conditions. In an example, when the recording/reproduction conditions are read, the sub-area 4a is accessed first, and if the recording/reproduction conditions cannot be read out, the second sub-area 4b is accessed. As a result, even when the information recorded in the first sub-area 1a or the second one 1b is difficult to be reproduced due to contamination of the medium or the like, it can be obtained from the other sub-area. Thus the reliability of the recording/reproduction conditions recorded in the medium is improved.

[0024] Preferably, the recording area 4 is used as an area for recording, together with the recording/reproduction conditions, recording/reproduction apparatus information for identifying a recording/reproduction apparatus which uses the recording/reproduction condi-



tions. In this example, the recording area 4 is assigned to have a sufficient capacity for recording a plurality of set of recording/reproduction conditions each accompanying recording/reproduction apparatus information. This configuration makes it possible to record a plurality of sets of recording/reproduction conditions in an optical recording medium and on recording, the recording/reproduction conditions suitable for the recording/reproduction apparatus used for recording are selected among the plurality of sets of the recording/reproduction conditions. As a result, when a single medium is used for a plurality of recording/reproduction apparatuses, the difference in the recording/reproduction characteristics among the apparatuses can be compensated.

**[0025]** Preferably, the recording/reproduction apparatus information has a hierarchy of a plurality of levels, and has manufacturer information identifying a manufacturer of a recording/reproduction apparatus, model information identifying the model of the recording/reproduction apparatus, serial number for identifying the recording/reproduction apparatus, etc. With this configuration, even if the recording/reproduction conditions determined by the recording/reproduction apparatus to be used for recording or reproduction are not recorded in a medium, recording/reproduction conditions can be adopted which are determined by a recording/reproduction apparatus having recording/reproduction characteristics similar to those of the recording/reproduction apparatus, such as a recording/reproduction apparatus of the same manufacturer or the same model. Thus, the learning for determining optimum recording/reproduction conditions can be omitted or shortened, and the waiting time for mounting the medium and for activating the recording/reproduction apparatus can be shortened.

**[0026]** Further, the recording/reproduction conditions recording area 4 may be used as an area for recording time information indicating the date and time of recording of the recording/reproduction conditions in the medium, besides the recording/reproduction conditions and the recording/reproduction apparatus information. In this case, a time elapsed from the determination of the recording/reproduction conditions can be calculated for recording by use of the time information. If the time elapsed from the determination of the recording/reproduction conditions is not shorter than a predetermined length, therefore, a change in the recording/reproduction characteristics of the recording/reproduction apparatus with time can be compensated by determining the optimum recording/reproduction conditions again.

**[0027]** In the embodiment described above, a GeSbTe alloy as a phase change material is used for the recording layer. As an alternative, another material such as a magneto-optic recording material or an organic pigment may be used. Further, the recording layer may be of write-once type which can be recorded only once, instead of a rewritable, erasable type. The recording/reproduction conditions in the recording area 4 can be updated or added by rewriting them over the old informa-

tion for the erasable type, and by recording them after the old information for the write-once type. Thus, for the write-once type, a comparatively large capacity is required to be provided for the recording area 4 for recording/reproduction conditions.

**[0028]** Further, the optimum recording/reproduction conditions may be recorded in the recording area 4 beforehand at the time of shipment. In such a case, difference in the recording characteristics between the individual media can be compensated at the time of shipment. Then, when the medium is mounted or the recording/reproduction apparatus is activated, the learning for determining the optimum recording/reproduction conditions can be omitted or shortened, thereby the waiting time can be shortened.

**[0029]** Next, an apparatus and a method for recording/reproduction using the optical recording medium described above are explained. Fig. 3 is a block diagram of a recording/reproduction apparatus in which an optical recording medium 1 shown in Fig. 1 or 2 is mounted. In the recording/reproduction apparatus, a spindle motor 24 rotates the optical recording medium 1 mounted. A controller 7 controls the entire recording/reproduction apparatus. A storage unit 16 has a memory device which stores recording/reproduction conditions including pulse conditions, servo conditions and reproduction signal processing conditions, recording/reproduction apparatus information for identifying the recording/reproduction apparatus which uses the recording/reproduction conditions, and time information indicating the date and time when the recording/reproduction conditions are determined. A modulator 19 converts the data recorded into a recording signal. A pulse condition setter 8 sets the pulse conditions when the information is recorded. A pulse controller 9 controls laser pulses in accordance with the pulse conditions. A laser drive circuit 10 drives a laser diode in accordance with signals from the pulse controller 9, and an optical head 11 including the laser diode focuses a laser beam in the medium for recording information or producing the reproduction signal from the reflected light. A preamplifier 12 amplifies the reproduction signal. A servo condition setter 21 sets servo conditions to a servo circuit 20, which controls the focusing and tracking of the optical head 11 in accordance with the servo conditions based on the signal output from the preamplifier 12. An equalizer 13 corrects frequency characteristics of the reproduction signal. An equalizing conditions setter 22 sets equalizing conditions to the equalizer 13, and a binarizer circuit 14 converting the signal corrected by the equalizer 13 to a binary signal. A binarization condition setter 23 sets a binarization slice level to the binarizer circuit 14. A recording/reproduction conditions demodulator 15 demodulates, from the signal produced by the binarizer circuit 14, the data including the recording/reproduction conditions recorded in the recording/reproduction conditions recording area of the medium 1, the recording/reproduction apparatus information for identifying the recording/

reproduction apparatus which uses the recording/reproduction conditions and the time information indicating the date and time of determination of the recording/reproduction conditions. A data demodulator 18 demodulates other data, and a signal quality determinator 17 determines the quality of the signal recorded or reproduced as a test from specified data in the test recording area in the medium.

[0030] The information is recorded by the PWM recording scheme. As shown in Fig. 4, a plurality of laser pulses into which a laser beam is segmented include a first pulse corresponding to the front end of a mark, intermediate pulses corresponding to an intermediate portion of the mark and the last pulse corresponding to the rear end of the mark. In Fig. 4, "a", "c" and "e" designate generation timing, length and intensity of the first pulse, respectively, and "b", "d" and "f" designate generation timing, length and intensity of the last pulse, respectively. Further, "g" designates intensity of the laser beam between pulses, and "h" designates intensity of the laser beam in the space portion. In the following, the conditions for forming a laser pulse including items "a" to "h" are referred to as pulse conditions. When a mark is formed, the laser pulses are radiated while changing the generation timings "a" and "b" of the first and last pulses, respectively, according to the mark length and space lengths before and after the mark in correspondence to the mark to be recorded. By using the recording/reproduction apparatus according to this embodiment, a mark can be formed to have edges of the front and rear ends thereof at predetermined positions. In addition, information can be reproduced well from the recording mark.

[0031] Next, a recording/reproduction method for the above-mentioned recording medium shown in Fig. 1 or 2 is explained. This recording/reproduction method and others to be explained later are performed by the controller 7. Fig. 5 is a flowchart of the recording/reproduction method. First, at step 401, the recording/reproduction apparatus is activated for the recording medium 1. The recording medium 1 is mounted and rotated on the spindle motor 24. Then a laser beam for reproducing information is radiated by the optical head 11 onto the medium 1. By accessing the lead-in area 3 in the medium 1, identification information or the like of the medium recorded in the lead-in area 3 is read out. In order to read the identification information or the like, reproduction signal obtained by the optical head 11 as a light beam reflected from the medium 1 is amplified by the preamplifier 12, and the frequency characteristics are corrected by the equalizer 13 according to predetermined equalizing conditions set by the equalizing conditions setter 22. Then, the signal is binarized by the binarization circuit 14 with a predetermined binarization slice level set by the binarization condition setter 23. The signal thus binarized is demodulated by the data demodulator 18 and sent to the controller 7. The servo circuit 20 has been set to predetermined servo conditions

by the servo condition setter 21, and it controls the focusing and tracking of the optical head based on the signal output from the preamplifier 12 in accordance with the servo conditions.

[0032] Then, at step 402, the recording/reproduction conditions are read. At this step, the recording/reproduction conditions recording area 4 in the medium 1 is accessed, and the servo conditions of the servo circuit 20 are set by the servo conditions setter 21 in accordance with predetermined conditions or conditions designated by the identification information of the medium. The focusing and tracking are controlled for the optical head 11 by the servo circuit 20. The reproduction signal obtained by the optical head 11 from the laser beam reflected from the medium 1 is amplified by the preamplifier 12, and the frequency characteristic is corrected by the equalizer 13 set by the equalizing conditions setter 22 to predetermined conditions or the equalizing conditions designated by the identification information of the medium. Then, the reproduction signal is binarized by the binarization circuit 14 which has been set to a binarization slice level predetermined by the binarization conditions setter 23 or a binarization slice level designated by the identification information of the medium. The signal thus binarized is demodulated by the recording/reproduction conditions demodulator 15 to be supplied to the controller 7.

[0033] Then, at step 403, it is decided whether or not the recording/reproduction conditions described above are recorded in the recording/reproduction conditions recording area 4 in the recording medium. If the conditions are decided to be recorded (YES at step 403), the recording/reproduction conditions are stored in the storage unit 16 at step 404, and the information is recorded at step 405 in the information recording area 6 in the medium based on the recording/reproduction conditions.

[0034] At step 405, the information is recorded in the following manner (refer to Fig. 6). In accordance with a content stored in the storage unit 16, the pulse conditions setter 8 sets pulse conditions to the pulse controller 9 (step 4051), the servo conditions setter 21 sets servo conditions to the servo circuit 20 (step 4052), the equalizing conditions setter 22 sets equalizing conditions to the equalizer 13 (step 4053), and the binarization condition setter 23 set a binarization slice level to the binarization circuit 14 (step 4054). The pulse conditions include, as described above with reference to Fig. 4, generation timings "a", "b", lengths "c", "d", and intensities "e", "f" of the first and last pulses, respectively, intensity "g" of the laser between the pulses, and laser intensity "h" in the space portions, which are respectively determined in accordance with the length of the mark to be recorded and the lengths of the space sections before and after the mark. The data supplied to the controller 7 are converted to a recording signal by the modulator 19, and the recording signal is converted by the pulse controller 9 to a laser drive signal satisfying the pulse

conditions set by the pulse conditions setter 8 (step 4055). The laser drive circuit 10 drives the laser diode provided in the optical head 11 in accordance with the laser drive signal. The optical head 11 for which the focusing and the tracking are controlled by the servo circuit 20 focuses the light radiated from the laser diode in the optical head and forms marks on the recording layer in the medium 1 to record the information.

**[0035]** At step 406, learning is performed for determining the recording/reproduction conditions when it is decided that the recording/reproduction conditions are not recorded in the recording area 4 on the recording medium (NO at step 403). The learning is performed in the following manner (refer to Fig. 7). First, according to predetermined specified conditions or conditions designated by the identification information in the medium described above, the pulse conditions setter 8 sets the pulse conditions to the pulse controller 9 (step 4061), the servo conditions setter 21 sets the servo conditions to the servo circuit 20 (step 4062), the equalizing conditions setter 22 sets the equalizing conditions to the equalizer 13 (step 4063), and the binarization conditions setter 23 sets the binarization slice level to the binarization circuit 14 (step 4064). Then, the specified data outputted from the controller 7 are converted to a recording signal by the modulator 19, and recorded as a test in the test recording area 5 in the medium 1 through the same procedure as at step 405 described above (step 4065). The reproduction signal of the data recorded as the test in the medium 1 in this way is amplified by the preamplifier 12, and after correcting the frequency characteristics by the equalizer 13. A jitter value (fluctuation of the position of the reproduced signal with respect to a reference clock) of the signal binarized by the binarization circuit 14 is measured by the signal quality determinator 17, and it is compared with a predetermined criterion, to determine the signal quality (step 4066). If the jitter value satisfies the criterion, the learning is completed. On the other hand, if the jitter value fails to satisfy the criterion, the pulse conditions, the servo conditions, the equalizing conditions and the binarization slice level are successively changed, and the specified data are recorded as a test and the signal quality of the data recorded is determined. This is repeated until the jitter value satisfies the criterion. Thus the optimum recording/reproduction conditions are determined.

**[0036]** Then, at step 407, the recording/reproduction conditions obtained by the learning at step 406 are stored in the storage unit 16. Then, at step 408, the recording/reproduction conditions are recorded in the recording/reproduction recording area 4 in the medium 1, and at step 405, information is recorded in the medium.

**[0037]** By using the procedure described above, when a recording medium is used for the first time, optimum pulse forming conditions obtained by the recording/reproduction apparatus are recorded in the recording/reproduction conditions recording area 4 in the recording medium 1. In this way, when the recording me-

dium 1 is used again, the recording/reproduction conditions recorded in the recording medium 1 are read and stored in the storage unit 16 in order to use them. As a result, the learning for determining the optimum recording/reproduction conditions is not necessarily performed each time the medium is used, but the learning can be omitted or shortened. Thus, the waiting time can be shortened for mounting the medium and for activating the recording/reproduction apparatus.

**[0038]** Fig. 8 is a flowchart of another recording/reproduction method performed by the controller 7. The method is carried out in the same procedure as the recording/reproduction method shown in Fig. 5 except some exceptions. Thus, only some points in Fig. 8 different from the recording/reproduction method described with reference to Fig. 5 will be explained below. If it is decided at step 503 that the recording/reproduction conditions are recorded in the recording area 4 in the recording medium 1 (YES at step 503), the recording/reproduction conditions are stored at step 504. At step 505, specified data are recorded as a test in the test recording area 5 in the medium 1. The test recording is conducted in the same procedure as the counterpart, step 405 in Fig. 5, except for the data to be recorded and the recording area in the medium.

**[0039]** Then, at step 506, the reproduction signal of the test data recorded in the test recording area 5 in the medium 1 at step 505 is amplified by the preamplifier 12, and the frequency characteristic is corrected by the equalizer 13. Then, the jitter value of the signal binarized by the binarization circuit 14 (fluctuation of the position of the signal reproduced with respect to a reference clock) is measured by the signal quality determinator 17. The measurement data is compared with a predetermined criterion to determine the signal quality. If the jitter value satisfies the criterion (YES at step 506), at step 507, the information is recorded in the information recording area 6 in the medium 1 in the same procedure as step 405. On the other hand, if the jitter value fails to satisfy the criterion (NO at step 506), the learning is performed at step 508 in the same procedure as step 406 in Fig. 5. Steps 501, 502, 509, 510 correspond to steps 401, 402, 407, 408 in Fig. 5, respectively, and they are not explained here.

**[0040]** The procedure described above can compensate the change in the recording/reproduction characteristics of the recording/reproduction apparatus and of the recording medium with the lapse of time from a time point when the recording/reproduction conditions are recorded in the medium to be used for recording. Further, when the information is recorded in a recording/reproduction apparatus different from the recording/reproduction apparatus, of which the recording/reproduction conditions are recorded in the medium, a difference in the recording/reproduction characteristic between apparatuses can be compensated.

**[0041]** Fig. 9 is a flowchart of a further recording/reproduction method according to the invention. The



method is carried out in the same procedure as the recording/reproduction method shown in Fig. 8 with some exceptions. Thus, some points in Fig. 9 different from those of the recording/reproduction method shown in Fig. 8 will be explained below. In the recording/reproduction method, a recording medium is used in which the recording area 4 is also used to record, together with the recording/reproduction conditions, time information indicating the date and time when the recording/reproduction conditions are recorded in the medium.

**[0042]** First, steps 601, 602 correspond to steps 501, 502, respectively in Fig. 8, and they are not explained here.

**[0043]** At step 603, the controller 7 determines whether the recording/reproduction conditions are recorded or not in the recording/reproduction conditions recording area 4 in the medium 1. If the recording/reproduction conditions and the time information, representing the date and time when the recording/reproduction conditions are recorded in the medium, are recorded in the recording/reproduction conditions recording area 4 (YES at step 603), the recording/reproduction conditions and the time information read at step 602 are stored in the storage unit 16 at step 604. Then, at step 605, the controller 7 compares the time information with the time of the clock in the controller 7. If the difference between them is longer than a predetermined reference (YES at step 605), the test recording is conducted at step 606 in the same procedure as at step 505 in Fig. 8. On the other hand, if the difference is shorter than the predetermined reference (NO at step 605), the information is recorded in the information recording area 6 in the medium 1 at step 608, in the same procedure as step 405 in Fig. 5 without the test recording.

**[0044]** Step 607 corresponds to step 506 in Fig. 8. If the determination at step 603 or at step 607 is negative (NO), the process proceeds to steps 609 to 611. At step 609, the recording/reproduction conditions are determined by a learning similar to step 406 in Fig. 5, and at step 610, the recording/reproduction conditions thus obtained are stored, together with the time when the recording/reproduction conditions are obtained (or time information), in the storage unit 16. At step 611, the obtained recording/reproduction conditions are recorded in the recording area 4 in the medium 1 together with the time information, and then the flow proceeds to step 608.

**[0045]** In such a case where recording media are frequently replaced in a recording/reproduction apparatus, the waiting time for activation can be shortened by omitting the above-mentioned test recording, by compensating a change in the recording/reproduction characteristics of the recording/reproduction apparatus and the recording medium with the lapse of time from the time point when the recording/reproduction conditions are recorded in the medium to be used.

**[0046]** Fig. 10 is a flowchart of a further recording/reproduction method according to the invention. This

method is carried out in the same procedure as the recording/reproduction method explained with reference to Fig. 5 with some exceptions. Therefore, some points in Fig. 10 different from those of the recording/reproduction method explained with reference to Fig. 5 will be explained below. This recording/reproduction method uses a recording medium in which the recording/reproduction conditions recording area 4 in the medium records, together with a plurality of recording/reproduction conditions, recording/reproduction apparatus information for identifying a recording/reproduction apparatus using the recording/reproduction conditions. The recording/reproduction apparatus information is divided into a plurality of hierarchical levels and has manufacturer information for identifying a manufacturer of the recording/reproduction apparatus, model information for identifying a model of the recording/reproduction apparatus and a serial number for identifying a particular recording/reproduction apparatus.

**[0047]** First, at step 701, an activation process similar to step 401 in Fig. 5 is executed. Then, at step 702, the recording/reproduction conditions and the recording/reproduction apparatus information for identifying the recording/reproduction apparatus which uses the recording/reproduction conditions are read from the recording/reproduction conditions recording area 4 in the medium 1. Then, if it is determined at step 703 that the recording/reproduction conditions are recorded in the recording area 4 (YES at step 703), the controller 7 checks at step 704 whether or not the recording/reproduction apparatus information read from the recording area 4 contains information coincident with the recording/reproduction apparatus information of the recording/reproduction apparatus. If there is the recording apparatus information coincident with the recording/reproduction apparatus information of the recording/reproduction apparatus on all points including the manufacturer information, the model information and the serial number (YES at step 704), at step 705, the recording/reproduction conditions, for which the recording/reproduction apparatus to be used are specified by the recording/reproduction apparatus information coincident with the recording/reproduction apparatus, are stored in the storage unit 16, and at step 706, the information is recorded in the recording area 6 in the medium 1, in the same procedure as step 405 in Fig. 5, based on the recording/reproduction conditions. If the determination at step 703 is negative (NO), the flow proceeds to step 707.

**[0048]** At step 704, if the recording/reproduction apparatus information read from the recording area 4 contains no information coincident with the recording/reproduction apparatus information of the recording/reproduction apparatus in all points including the manufacturer information, the model information and the serial number (NO at step 704), recording/reproduction conditions are selected from the plurality of recording/reproduction conditions read from the recording area 4 at step 710, in a priority order. High priority is given to the re-



recording/reproduction conditions coincident on manufacturer information and model number in the recording/reproduction apparatus information for identifying the recording/reproduction apparatus using the recording/reproduction conditions, next priority is given to those coincident only on manufacturer information, and low priority is given to those coincident on no information or having no recording/reproduction apparatus information. Then, at step 710, the recording/reproduction conditions are selected, and at step 711 they are stored in the storage unit 16. Then, the flow proceeds to step 707.

**[0049]** At step 707, the learning is performed with the recording/reproduction conditions as initial conditions. At step 708, the recording/reproduction conditions obtained by the learning are stored in the storage unit 16, and at step 709, the recording/reproduction conditions and the recording/reproduction apparatus information of the particular recording/reproduction apparatus are recorded in the recording area 4. At step 706, the information based on the recording/reproduction conditions is recorded in the information recording area 6 in the medium 1.

**[0050]** At step 709, if a number of the recording/reproduction conditions accompanying other recording/reproduction apparatus information already recorded in the recording area 4 has not reached a specified number, the information is held while recording new recording/reproduction conditions and the recording/reproduction apparatus information are added. On the other hand, if the number of the recording/reproduction conditions has reached the specified number, the new recording/reproduction conditions and new recording/reproduction apparatus information are recorded, while the oldest in the recording/reproduction conditions and the recording/reproduction apparatus information are discarded.

**[0051]** The recording/reproduction described above makes it possible to record a plurality of recording/reproduction conditions in a medium and to select recording/reproduction conditions suitable for the recording/reproduction apparatus intended to be used for recording among a plurality of the recording/reproduction conditions read out from the medium. Therefore, when one medium is used for a plurality of recording/reproduction apparatuses, the difference in the recording/reproduction characteristic between the apparatuses can be compensated. Further, even for a medium in which the recording/reproduction conditions determined by the recording/reproduction apparatus itself intended to be used for recording are not recorded, the learning is performed by using as initial conditions the recording/reproduction conditions determined by the recording/reproduction apparatus having a recording/reproduction characteristic similar to the recording/reproduction apparatus, such as a recording/reproduction apparatus of the same model or one made by the same manufacturer. In this way, the learning can be shortened and the waiting time can be shortened for mounting the medium and

the activating the recording/reproduction apparatus.

**[0052]** Further, when newly determined recording/reproduction conditions are recorded in a medium, if a number of the recording/reproduction conditions already recorded has reached a specified number, the oldest recording/reproduction conditions are discarded. In this way, the recording/reproduction conditions adapted for the recording/reproduction apparatuses most likely to be used can always be held in the medium.

**[0053]** The operation of steps 710 and 711 can be omitted. Further, the recording/reproduction apparatus information is not limited to the three hierarchical levels, but information other than the manufacturer information, the model information and the serial number can be added or a part of the information can be omitted.

**[0054]** Fig. 11 is a flowchart of a still further recording/reproduction method according to the invention. This method is carried out in the same procedure as the recording/reproduction method described with reference to Fig. 10 with some exceptions. Therefore, some points different from the recording/reproduction method of Fig. 10 will be explained.

**[0055]** Steps 801, 802 and 803 are similar to steps 701, 702 and 703 in Fig. 10, respectively, and they are not explained here.

**[0056]** At step 804, the recording/reproduction apparatus information read from the recording area 4 in the recording medium 1. If they contain the recording apparatus information coincident with the recording/reproduction apparatus information for the recording/reproduction apparatus in all the points including the manufacturer information, the model information and the serial number (YES at step 804), at step 805, the recording/reproduction conditions, for which the recording/reproduction apparatus to be used is specified by the recording/reproduction apparatus information coincident with the particular recording/reproduction apparatus, are stored in the storage unit 16. Then, at step 806, the test recording is performed. This test recording is carried out in the same procedure as step 506 in Fig. 8. Next, at step 812, the signal quality is determined in the same procedure as step 506 in Fig. 8. If the signal quality satisfies a criterion (YES at step 812), the information is recorded in the information recording area 6 in the medium 1 at step 813.

**[0057]** On the other hand, if the determination fails to satisfy the criteria (NO at step 803, 804 or 812), the learning is performed at step 807, and the process proceeds to steps 808, 809 and 813 in that order. Steps 807, 808, 809 correspond to steps 707, 708, 709 in Fig. 10, respectively.

**[0058]** In the recording/reproduction described above, change can be compensated in the recording/reproduction characteristic of the recording/reproduction apparatus and the recording medium with the lapse of time from a time point when the recording/reproduction conditions are recorded for the medium to be used.

**[0059]** Fig. 12 is a flowchart of a still further recording/

reproduction method according to the invention. This method is carried out in the same procedure as the recording/reproduction method explained with reference to Fig. 11 with some exceptions. Therefore, some points in Fig. 12 different from the recording/reproduction method explained with reference to Fig. 11 will be explained below. This recording/reproduction method uses a recording medium in which the recording area 4 in the medium 1 is used for recording time information indicating the date and time when the recording/reproduction conditions are recorded in the medium, together with the recording/reproduction conditions and the recording/reproduction apparatus information for identifying the recording/reproduction apparatus which uses the recording/reproduction conditions.

**[0060]** Steps 901 to 905 correspond to steps 801 to 805 in Fig. 11, respectively. At step 902, the time when the recording/reproduction conditions are obtained (time information) is read in addition to the recording/reproduction conditions and the recording/reproduction apparatus information, and at step 905, they are stored.

**[0061]** At step 912, the time information accompanying the recording/reproduction conditions stored in the storage unit 16 is compared with the time of the clock in the controller 7. If the difference is longer than a predetermined reference (YES at step 912), the test recording is carried out at step 913. On the other hand, if the difference is shorter than the predetermined reference (NO at step 912), the information is recorded in the information recording area 6 in the medium 1 without test recording. Steps 913, 914 and 906 correspond to steps 806, 812 and 813 in Fig. 11, respectively. Further, steps 907, 908 and 909 correspond to steps 807, 808 and 809 in Fig. 11, respectively.

**[0062]** In the recording/reproduction described above, a change can be compensated in the recording characteristic of the recording/reproduction apparatus with the lapse of time from a time point when the recording/reproduction conditions are recorded in the medium to be used, while shortening the waiting time for activation by omitting the test recording if the recording medium is frequently replaced in the recording/reproduction apparatus.

**[0063]** According to the embodiment described above, jitter value of the reproduced signal is measured and compared with a reference value to determine the quality of the recorded test signal. As an alternative, error rate of the data obtained by demodulating the reproduced signal is measured and compared with a reference value in order to determine the quality of the recorded test signal.

**[0064]** Further, in the learning in the embodiment described above, the operation is repeated in which the recording/reproduction conditions are changed while conducting the test recording to measure the quality of the signal recorded in a test, and at the time point when the quality of the signal has satisfied a criterion, the operation is completed and the recording/reproduction

conditions at that time are determined as the optimum recording/reproduction conditions. As an alternative, the test recording is performed and the quality of the signal recorded in the test is checked while the recording/reproduction conditions is changed in a predetermined range. This operation is repeated. The, the recording/reproduction conditions included in the predetermined range which represents the best quality of the signal recorded in the test are determined as the optimum recording/reproduction conditions.

**[0065]** All the items of the recording/reproduction conditions may not necessarily be recorded in the medium, but only a specified item or items in the recording/reproduction conditions may be used for the learning.

**[0066]** Further, as to the recording/reproduction information on which the recording/reproduction apparatus to be used is specified, the information recorded in the recording area in the medium may be setting conditions or code information which satisfy the recording/reproduction conditions, in place of the recording/reproduction conditions. For example, as to the pulse conditions, the setting value of the laser drive circuit for producing the laser intensity or the code information indicating the setting value may be recorded as recording/reproduction conditions, in place of the laser intensity, in the recording area in the medium as the recording/reproduction conditions.

**[0067]** When the medium shown in Fig. 2 is used, at steps 402, 502, 602, 702, 802, 902 in Figs. 5 to 12, the first recording/reproduction recording area 4a in Fig. 2 is reproduced, and then if the recording/reproduction conditions cannot be read, the second recording/reproduction recording area 4b is reproduced. Further, at steps 408, 510, 611, 709, 809, 909 in Figs. 5 to 12, the recording/reproduction conditions are recorded in both the first and second recording area 4a and 4b. This improves the reliability of the recording/reproduction conditions recorded in the medium in view of the fact that even when the information recorded in one of the first and second recording areas 4a and 4b cannot be reproduced due to the contamination of the medium or the like, the information can be obtained from the other recording area.

**[0068]** As described above, in an optical recording medium according to the invention, a recording/reproduction apparatus and a recording/reproduction method according to the invention, it is advantageous that the optimum recording/reproduction conditions, which are determined for a given recording medium and recorded in the medium, can be read and used in subsequent operations. This eliminates or shortens the learning for determining the recording/reproduction conditions which otherwise might be required to be measured each time. Thus, the waiting time for mounting the recording medium or activating the recording medium in the recording/reproduction apparatus can be shortened.

**[0069]** Further, the recording/reproduction conditions and the recording/reproduction apparatus information

for identifying the recording/reproduction apparatus using the recording/reproduction conditions are recorded, and at the time of activation, the recording/reproduction conditions adapted for the recording/reproduction apparatus to be used for recording are selected for use among the recording/reproduction conditions read from the medium. Even when a specified recording medium is used for a plurality of recording/reproduction apparatuses, the operation of determining the optimum recording/reproduction conditions is eliminated or shortened, thereby making it possible to shorten the waiting time for mounting the medium and activating the recording/reproduction apparatus.

[0070] Although the present invention has been fully described in connection with the preferred embodiments thereof with reference to the accompanying drawings, it is to be noted that various changes and modifications are apparent to those skilled in the art. Such changes and modifications are to be understood as included within the scope of the present invention as defined by the appended claims unless they depart therefrom.

#### Claims

1. An optical recording medium for recording information by forming a mark with laser pulses radiated thereon, comprising:
  - a information recording area provided for recording the information; and
  - a recording/reproduction conditions recording area, to which recording by a recording/reproduction apparatus is possible, provided for recording recording/reproduction conditions representing setting values for the recording/reproduction apparatus for recording or reproducing information.
2. The optical recording medium according to claim 1, wherein said recording/reproduction conditions recording area has a capacity enough to record a plurality of sets of the recording/reproduction conditions.
3. The optical recording medium according to claim 1, wherein said recording/reproduction conditions recording area is divided into a plurality of sub-areas.
4. The optical recording medium according to claim 1, wherein optimum recording/reproduction conditions are recorded in said recording/reproduction conditions recording area.
5. The optical recording medium according to one of claims 1 to 4, wherein said recording/reproduction conditions recording area is further used for recording apparatus information for identifying the recording/reproduction apparatus which uses the recording/reproduction conditions.
6. The optical recording medium according to claim 5, wherein the recording/reproduction conditions and the apparatus information are recorded, without changing the contents thereof, in each of a plurality of sub-areas provided in said recording/reproduction conditions recording area.
7. The optical recording medium according to claim 1, wherein the recording/reproduction conditions comprises setting values for various circuits in the recording/reproduction apparatus or code information indicating the setting values.
8. The optical recording medium according to claim 1, further comprising a test recording area provided for test recording of a specified signal to measure a quality of reproduced signal.
9. The optical recording medium according to one of claims 1 to 8, further comprising a lead-in area for forming read-only data, wherein said recording/reproduction conditions recording area and said test recording area are arranged between the information recording area and said lead-in area.
10. The optical recording medium according to claim 9, wherein said lead-in area is an area where embossed pits are formed for recording data.
11. The optical recording medium according to claim 1, wherein the recording/reproduction conditions include at least one of pulse conditions for determining a shape of laser pulse on recording, servo conditions for determining servo operations on recording and on reproduction and reproduction signal processing conditions.
12. The optical recording medium according to claim 11, wherein a plurality of laser pulses are radiated on a portion of a mark to be recorded from a front end to a rear end thereof, and the pulse conditions include at least one of generation timing of a first pulse corresponding to a front end of the mark, a length of the first pulse, an intensity of a laser beam of the first pulse, a generation timing of a last pulse corresponding to the rear end of the mark, a length of the last pulse, an intensity of the laser beam of the last pulse, an intensity of the laser beam between the pulses and an intensity of the laser beam in a space portion, which are determined in accordance with a length of the mark to be recorded and lengths of space sections before and after the mark.
13. A recording/reproduction method for recording/re-



producing information by using marks formed with radiation of laser pulses on an optical recording medium, wherein lengths of the marks and those of space sections before and after the marks represent the information, comprising the steps of:

reading recording/reproduction conditions in a recording/reproduction conditions recording area in the medium, to which recording by a recording/reproduction apparatus is possible; and  
recording or reproducing information based on the recording/reproduction conditions wherein a plurality of pulses are radiated from a front end to a rear end of a mark when the mark is formed.

14. The recording/reproduction method according to claim 13, wherein the recording/reproduction conditions recording area in the optical recording medium comprises a plurality of sub-areas and the same recording/reproduction conditions are recorded therein, and when the recording/reproduction conditions are read from the optical recording medium, a first of the plurality of sub-areas is reproduced first, and if the recording/reproduction conditions cannot be read, another sub-area in the plurality of sub-areas is reproduced.

15. The recording/reproduction method according to claim 13, wherein the recording/reproduction conditions comprise at least one of pulse conditions for determining a shape of the laser pulses on recording, servo conditions for determining servo operations on recording/reproduction and reproduction signal processing conditions.

16. The recording/reproduction method according to claim 15, wherein the pulse conditions include at least one of a generation timing of a first pulse corresponding to the front end of the mark, a length of the first pulse, an intensity of the laser beam of the first pulse, a generation timing of a last pulse corresponding to the rear end of the mark, a length of the last pulse, an intensity of the laser beam of the last pulse, an intensity of the laser beam between the pulses, and an intensity of the laser beam in space sections, which are all determined in accordance with a length of the mark to be recorded and lengths of the space sections before and after the mark.

17. The recording/reproduction method according to one of claims 13 to 16, further comprising the steps of:

performing test recording in a test recording area provided in the optical recording medium, by recording specified data therein as a test based

on the recording/reproduction conditions, and if a measurement result of quality of a signal reproduced from the data of the test recording satisfies a predetermined criterion, recording or reproducing the information based on the recording/reproduction conditions;

or if the measurement result fails to satisfy the predetermined criterion, repeating the test recording while changing the recording/reproduction conditions, determining optimum recording/reproduction conditions by measuring a quality of a signal reproduced in the test recording and by comparing it with the predetermined criterion (this operation is referred to as learning), and recording or reproducing the information based on the optimum recording/reproduction conditions determined by the learning while recording the optimum recording/reproduction conditions in the recording/reproduction conditions recording area.

18. The recording/reproduction method according to claim 17, wherein the same content of the optimum recording/reproduction conditions determined by the learning is recorded in a plurality of sub-areas provided in the recording/reproduction conditions recording area.

19. The recording/reproduction method according to claim 17, wherein time information representing date and time when the recording/reproduction conditions are recorded is recorded in the recording/reproduction conditions recording area in the optical recording medium, together with the optimum recording/reproduction conditions, further comprising the step of:

reading the time information in the recording region in said step of reading the recording/reproduction conditions;  
calculating a time elapsed from the date and time in the time information; and  
omitting said step of test recording if the elapsed time is not longer than a predetermined length.

20. The recording/reproduction method according to one of claims 13 to 16, wherein if the recording/reproduction conditions are not recorded in the recording/reproduction conditions recording area in the medium, said step of test recording is repeated by recording specified data as a test based on the recording/reproduction conditions, while changing the recording/reproduction conditions, optimum recording/reproduction conditions are determined by measuring a quality of a signal reproduced from the test recording data and by comparing it with a predetermined criterion (this operation is referred to as

learning), and information is recorded or reproduced based on the optimum recording/reproduction conditions determined by the learning while the optimum recording/reproduction conditions are recorded in the recording/reproduction conditions recording area.

21. A recording/reproduction method - for recording/reproducing information by forming marks with radiation of laser pulses on an optical recording medium, wherein lengths of the marks and those of space sections before and after the marks represent the information, comprising the steps of:

reading recording/reproduction conditions and recording/reproduction apparatus information for identifying a recording/reproduction apparatus which uses the recording/reproduction conditions recorded together with the recording/reproduction conditions from a recording/reproduction conditions recording area in the medium, to which recording by a recording/reproduction apparatus is possible; and recording or reproducing information based on the recording/reproduction conditions accompanying the recording/reproduction apparatus information coinciding with the recording/reproduction apparatus to be used wherein a plurality of pulses are radiated from a front end to a rear end of a mark when the mark is formed.

22. The recording/reproduction method according to claim 21, wherein the recording/reproduction conditions recording area is divided into a plurality of sub-areas, the same content of the recording/reproduction conditions being recorded in each of the plurality of sub-areas, and when the recording/reproduction conditions and the recording/reproduction apparatus information are read, a first of the plurality of sub-areas is first reproduced, and if the recording/reproduction conditions and the recording/reproduction apparatus information cannot be read therefrom, another of the plurality of sub-areas is reproduced.

23. The recording/reproduction method according to claim 21, wherein the recording/reproduction conditions include setting values for various circuits in the recording/reproduction apparatus or code information indicating the setting values.

24. The recording/reproduction method according to claim 21, wherein the recording/reproduction conditions comprise at least one of pulse conditions for determining a shape of the laser pulse on recording, servo conditions for determining servo operations on recording/reproduction and reproduction signal processing conditions.

25. The recording/reproduction method according to claim 24, wherein the pulse conditions include at least one of a generation timing of a first pulse corresponding to the front end of the mark, a length of the first pulse, an intensity of a laser beam of the first pulse, a generation timing of the last pulse corresponding to the rear end of the mark, a length of the last pulse, an intensity of the laser beam of the last pulse, an intensity of the laser beam between the pulses, and an intensity of the laser beam in space sections, which are all determined in accordance with a length of the mark to be recorded and lengths of the space sections before and after the mark.

26. The recording/reproduction method according to one of claims 21 to 25, further comprising the steps of:

performing test recording in a test recording area provided in the optical recording medium, by recording specified data therein as a test based on the recording/reproduction conditions accompanying the recording/reproduction apparatus information coinciding with the recording/reproduction apparatus to be used for recording or reproduction; and if a measurement result of a quality of a signal reproduced from the data of the test recording satisfies a predetermined criterion, recording or reproducing the information based on the recording/reproduction conditions; or if the measurement result fails to satisfy the predetermined criterion, repeating the test recording while changing the recording/reproduction conditions, determining optimum recording/reproduction conditions by measuring a quality of a signal reproduced in the test recording and by comparing it with the predetermined criterion (this operation is referred to as learning), and recording or reproducing the information based on the optimum recording/reproduction conditions determined by the learning while recording the optimum recording/reproduction conditions in the recording/reproduction conditions recording area together with the recording/reproduction apparatus information of the recording/reproduction apparatus.

27. The recording/reproduction method according to claim 26, wherein the same content of the optimum recording/reproduction conditions determined by the learning and the recording/reproduction apparatus information of the recording/reproduction apparatus are recorded in a plurality of sub-areas provided in the recording/reproduction conditions recording area in the optical recording medium.

28. The recording/reproduction method according to claim 26, wherein time information representing date and time when the recording/reproduction conditions are recorded is recorded in the recording/reproduction conditions recording area in the optical recording medium, together with the optimum recording/reproduction conditions and the recording/reproduction apparatus information for identifying the recording/reproduction apparatus which uses the recording/reproduction conditions, further comprising the steps of:

reading the time information in the recording/reproduction conditions recording region in said step of reading the recording/reproduction conditions; 15  
calculating a time elapsed from the date and time in the time information; and  
omitting said step of test recording if the elapsed time is not longer than a predetermined length. 20

29. The recording/reproduction method according to one of claims 21 to 25, further comprising the steps of: 25

when the recording/reproduction conditions accompanying the recording/reproduction apparatus information coinciding with the recording/reproduction apparatus to be used are not recorded in the recording/reproduction conditions recording area, performing test recording in a test recording area provided in the optical recording medium, by recording specified data therein as a test, and repeating the test recording by changing the recording/reproduction conditions; 30  
determining optimum recording/reproduction conditions by measuring a quality of a signal reproduced in the test recording and by comparing it with the predetermined criterion (this operation is referred to as learning), and recording or reproducing the information based on the optimum recording/reproduction conditions determined by the learning while recording the optimum recording/reproduction conditions in the recording/reproduction conditions recording area together with the recording/reproduction apparatus information of the recording/reproduction apparatus. 35 40 45 50

30. The recording/reproduction method according to claim 29, wherein when the recording/reproduction conditions accompanying the recording/reproduction apparatus information coinciding with the recording/reproduction apparatus to be used are not recorded in the recording/reproduction conditions recording area, but the recording/reproduction con- 55

ditions not accompanying the recording/reproduction apparatus information or the recording/reproduction conditions accompanying the recording/reproduction apparatus information for a different recording/reproduction apparatus are recorded in the recording/reproduction conditions recording area in the medium, performing test recording in a test recording area provided in the optical recording medium with the recorded recording/reproduction conditions, by recording specified data therein as a test based on the recording/reproduction conditions as initial conditions, and

if a measurement result of a quality of a signal reproduced from the data of the test recording satisfies a predetermined criterion, recording or reproducing the information based on the recording/reproduction conditions;  
or if the measurement result fails to satisfy the predetermined criterion, repeating the test recording while changing the recording/reproduction conditions, determining optimum recording/reproduction conditions by measuring a quality of a signal reproduced in the test recording and by comparing it with the predetermined criterion (this operation is referred to as learning), and recording or reproducing the information based on the optimum recording/reproduction conditions determined by the learning while recording the optimum recording/reproduction conditions in the recording/reproduction conditions recording area together with the recording/reproduction apparatus information of the recording/reproduction apparatus.

31. The recording/reproduction method according to one of claims 21 to 30, wherein the recording/reproduction apparatus information has a plurality of hierarchical levels.

32. The recording/reproduction method according to claim 31, wherein the recording/reproduction apparatus information comprises at least one of manufacturer information for identifying a manufacturer of the recording/reproduction apparatus, model information for identifying a model of the recording/reproduction apparatus and a serial number of recording/reproduction apparatus for identifying the particular recording/reproduction apparatus.

33. The recording/reproduction method for an optical recording medium according to one of claims 21 to 32, wherein a plurality of combinations of the recording/reproduction conditions and the recording/reproduction apparatus information for identifying the recording/reproduction apparatus which uses the recording/reproduction conditions are recorded in the recording/reproduction conditions recording



area in the optical recording medium.

34. The recording/reproduction method according to claim 31 or 32, wherein a plurality of sets of recording/reproduction conditions are recorded in the recording/reproduction conditions recording area, further comprising the steps of:

wherein when no recording/reproduction conditions are recorded in the recording/reproduction conditions recording area accompanying the recording/reproduction apparatus information coinciding, in all of the hierarchical levels, with the recording/reproduction apparatus to be used, selecting the recording/reproduction conditions accompanying the recording/reproduction apparatus information coinciding with the recording/reproduction apparatus at the greatest number of the hierarchical levels;

performing test recording in a test recording area provided in the optical recording medium, by recording specified data therein as a test based on the selected recording/reproduction conditions as initial conditions, and

if a measurement result of a quality of a signal reproduced from the data of the test recording satisfies a predetermined criterion, recording or reproducing the information based on the recording/reproduction conditions;

or if the measurement result fails to satisfy the predetermined criterion, repeating the test recording while changing the recording/reproduction conditions, determining optimum recording/reproduction conditions by measuring a quality of a signal reproduced in the test recording and by comparing it with the predetermined criterion (this operation is referred to as learning), and recording or reproducing the information based on the optimum recording/reproduction conditions determined by the learning while recording the optimum recording/reproduction conditions in the recording/reproduction conditions recording area together with the recording/reproduction apparatus information of the recording/reproduction apparatus.

35. The recording method according to claim 26, wherein in said step of recording the recording/reproduction conditions and the recording/reproduction apparatus information, if other recording/reproduction conditions accompanying recording/reproduction apparatus information are already recorded in the recording/reproduction conditions recording area, new recording/reproduction conditions accompanying the recording/reproduction apparatus information are added to the recording/reproduction conditions recording area while holding the already recorded recording/reproduction conditions accom-

panying the recording/reproduction apparatus information.

36. The recording method for according to claim 35, wherein if a number of sets of the recording/reproduction conditions accompanying the recording/reproduction apparatus information already recorded in the recording/reproduction conditions recording area reaches a specified number, the oldest set of the recording/reproduction conditions and the recording/reproduction apparatus information are deleted.

37. An optical recording/reproduction apparatus for recording/reproducing information with marks formed with radiation of laser pulses on an optical recording medium, wherein lengths of the marks and those of space sections before and after the marks represent the information, said apparatus comprising:

a spindle motor which rotates the optical recording medium;

an optical head which radiates a laser pulse with a laser diode onto the optical recording medium;

a servo circuit which drives said laser diode;

a laser driver which drives said optical head according to pulse signals for recording information;

a pulse controller which generates pulses for driving said laser driver, wherein a plurality of pulses are generated to radiate from a front end to a rear end of the mark to record the information;

an equalizer which corrects frequency characteristic of reproduction signal detected by said optical head;

a binarizing circuit which converts the reproduction signal corrected by said equalizer to a binarized signal; and

a storage device for storing recording/reproduction conditions read from a recording/reproduction conditions recording area provided in the optical recording medium; and

at least one of first setting means for setting pulse conditions for said pulse controller in accordance with the recording/reproduction conditions, second setting means for setting servo conditions for said servo circuit, third setting means for setting equalizing conditions of reproduction signal to said equalizer and fourth setting means for setting a binarization slice level of the reproduction signal to said binarizing circuit.

38. The recording/reproduction apparatus according to claim 37, wherein said first setting means sets at least one of a generation timing of a first pulse cor-

responding to the front end of the mark, a length of the first pulse, an intensity of a laser beam of the first pulse, a generation timing of the last pulse corresponding to the rear end of the mark, a length of the last pulse, an intensity of the laser beam of the last pulse, an intensity of the laser beam between the pulses, and an intensity of the laser beam in space sections, which are all determined in accordance with a length of the mark to be recorded and lengths of the space sections before and after the mark.

39. The recording/reproduction apparatus according to claim 37 or 38, wherein said storage device stores the recording/reproduction conditions together with the recording/reproduction apparatus information which uses the recording/reproduction conditions from the optical recording medium.
40. The recording/reproduction apparatus according to one of claims 37 to 39, wherein said storage device stores the recording/reproduction conditions together with time information representing date and time when the recording/reproduction conditions read from the medium are recorded in the optical recording medium.

30

35


40

45

50

55

*Fig. 1*

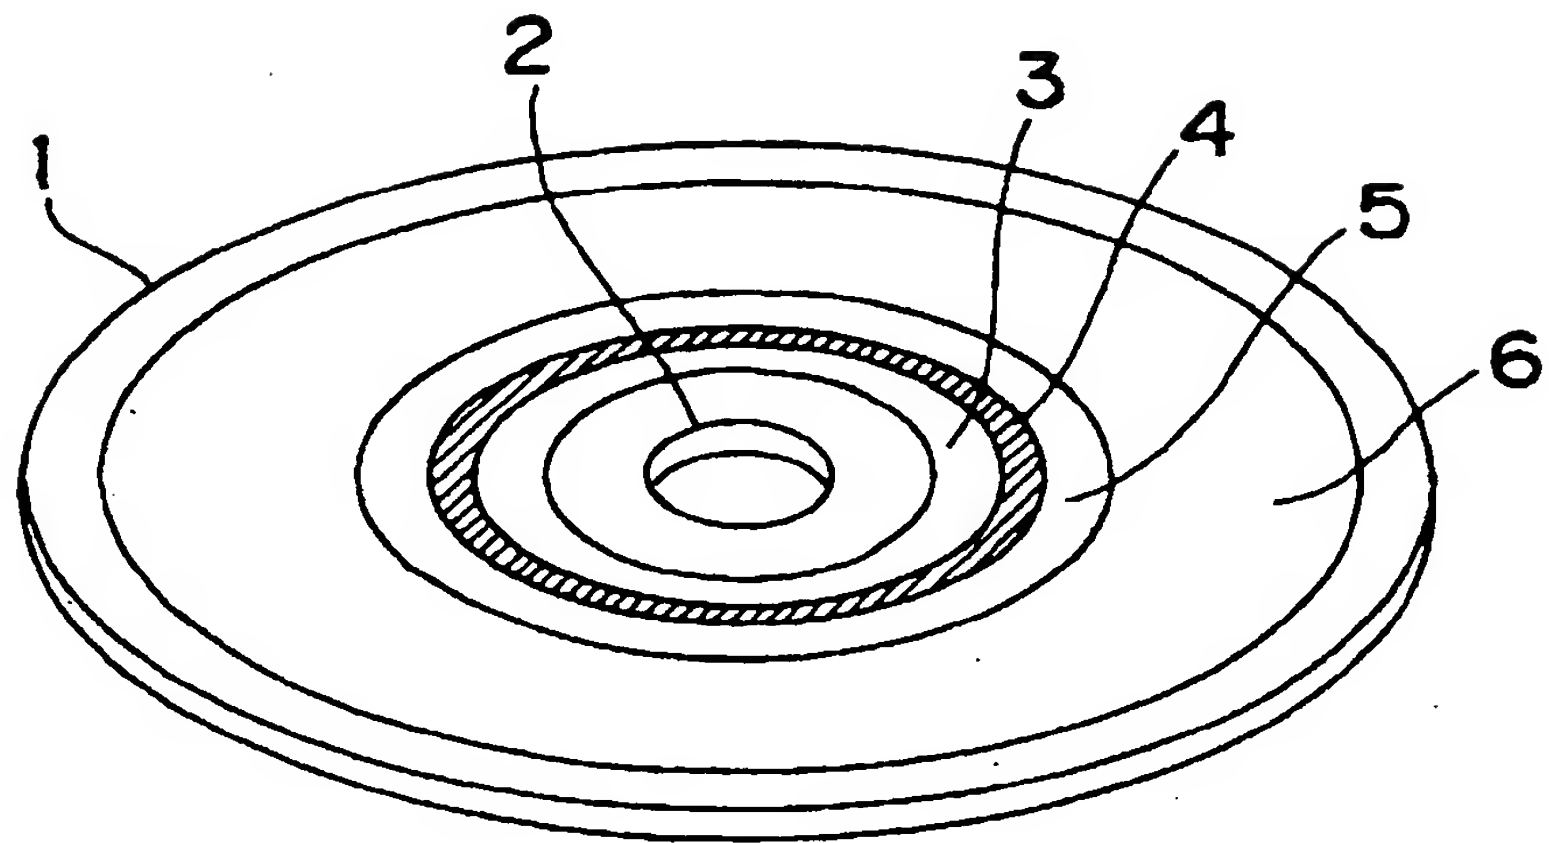

*Fig. 2*

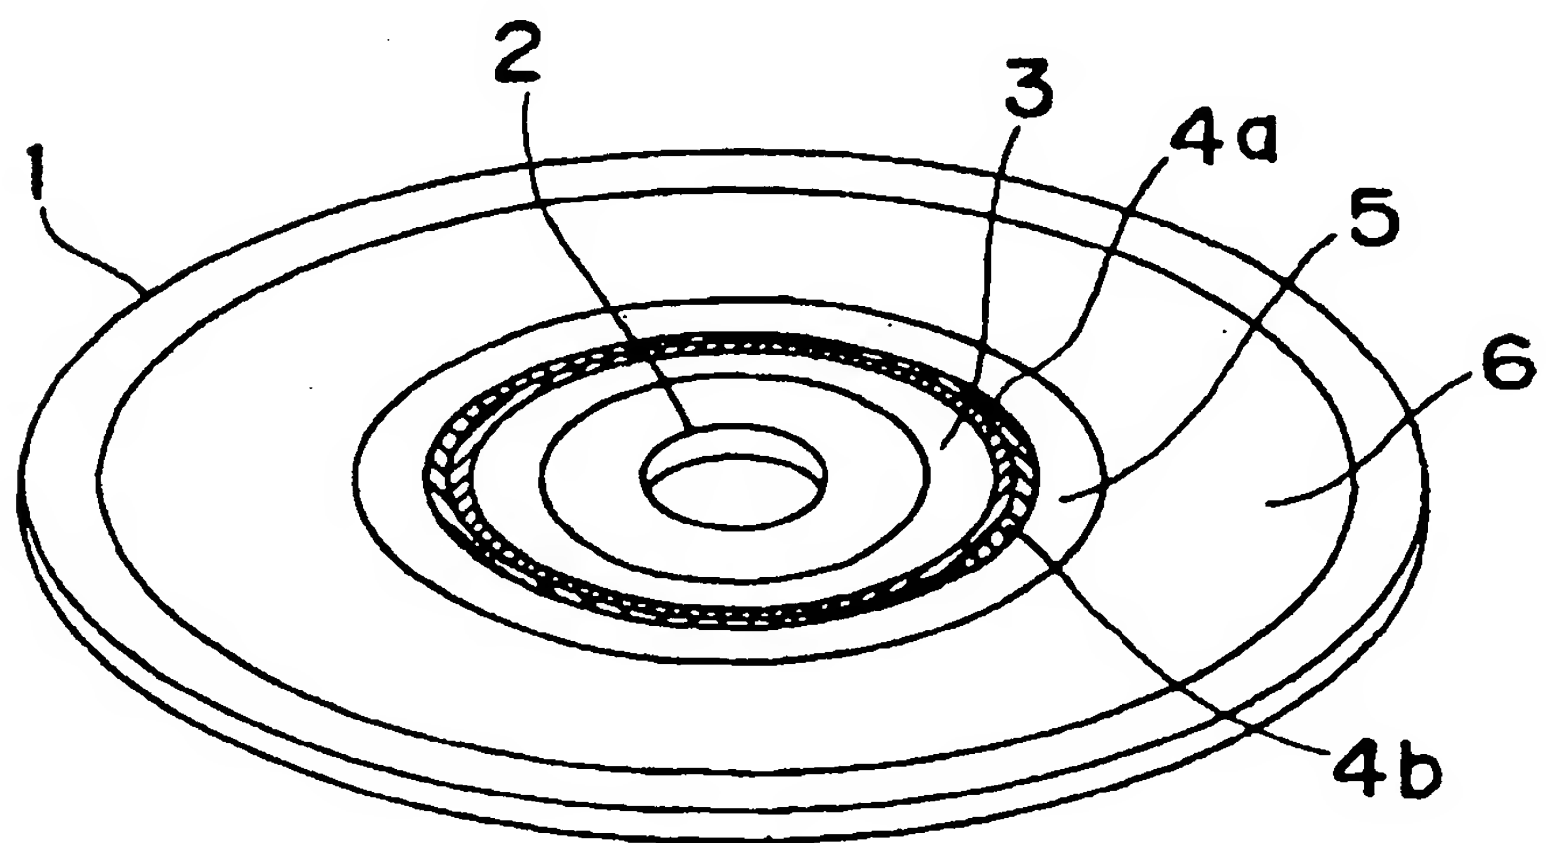




Fig.3

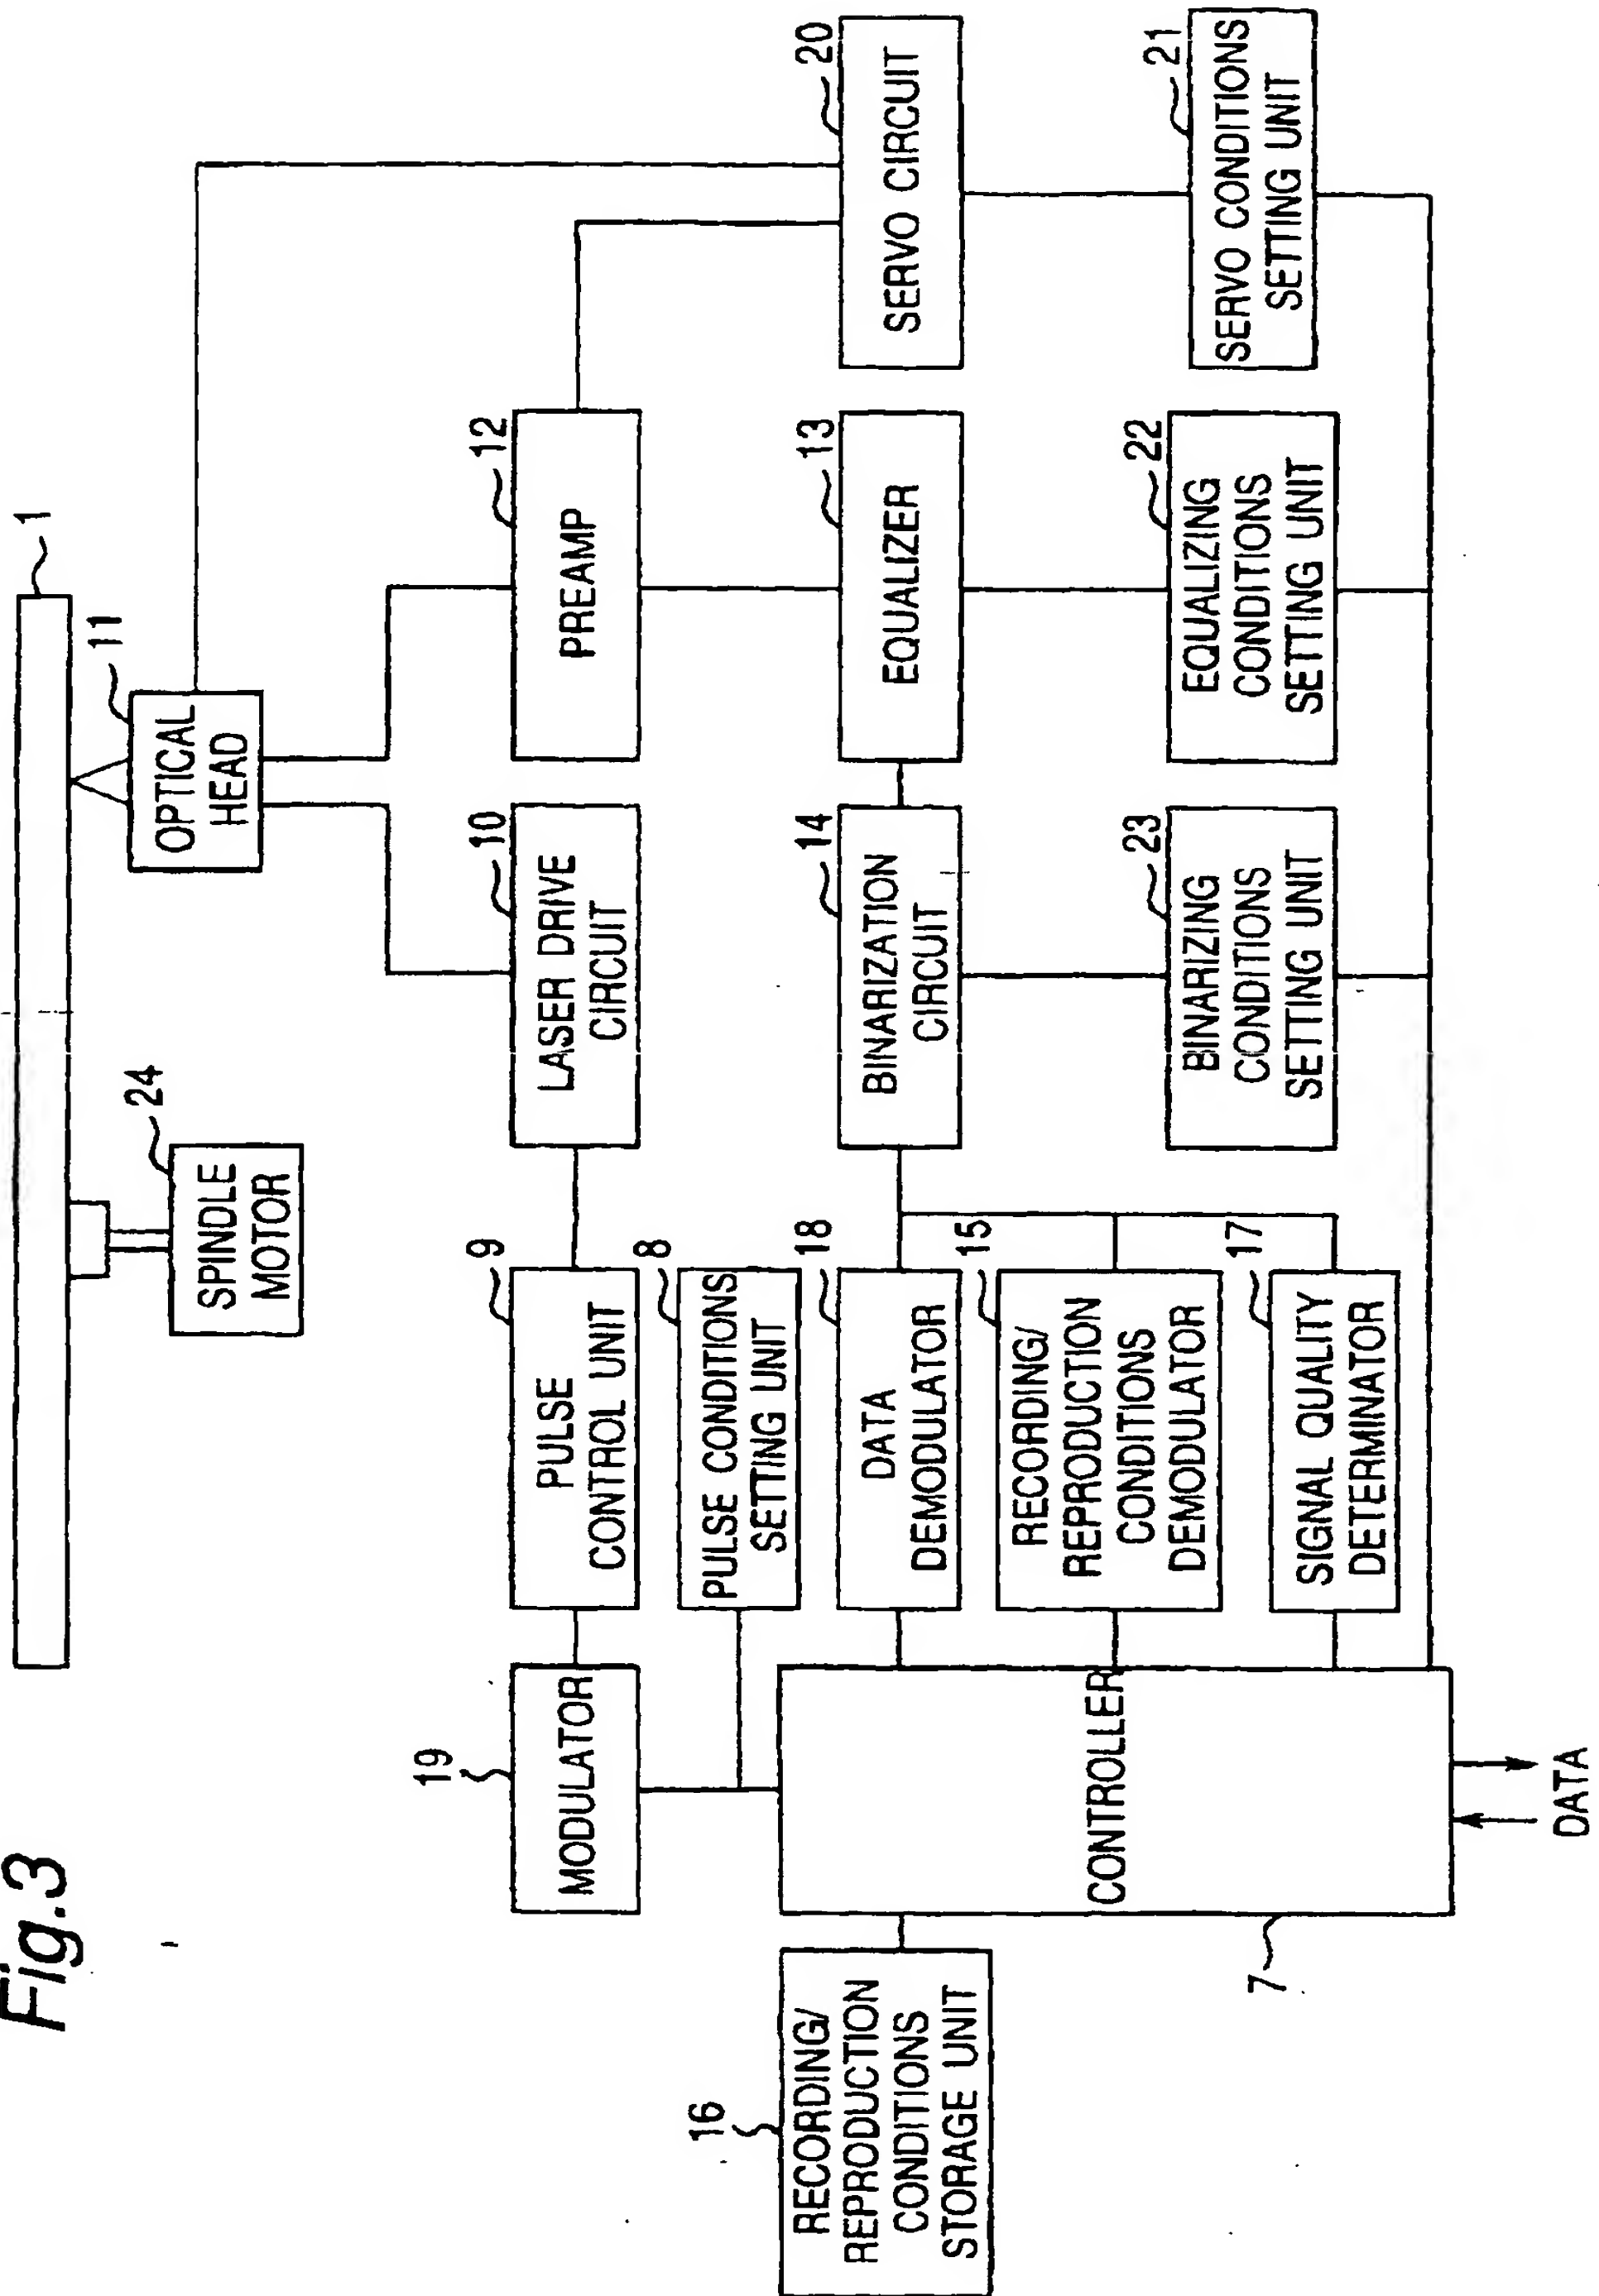


Fig.4

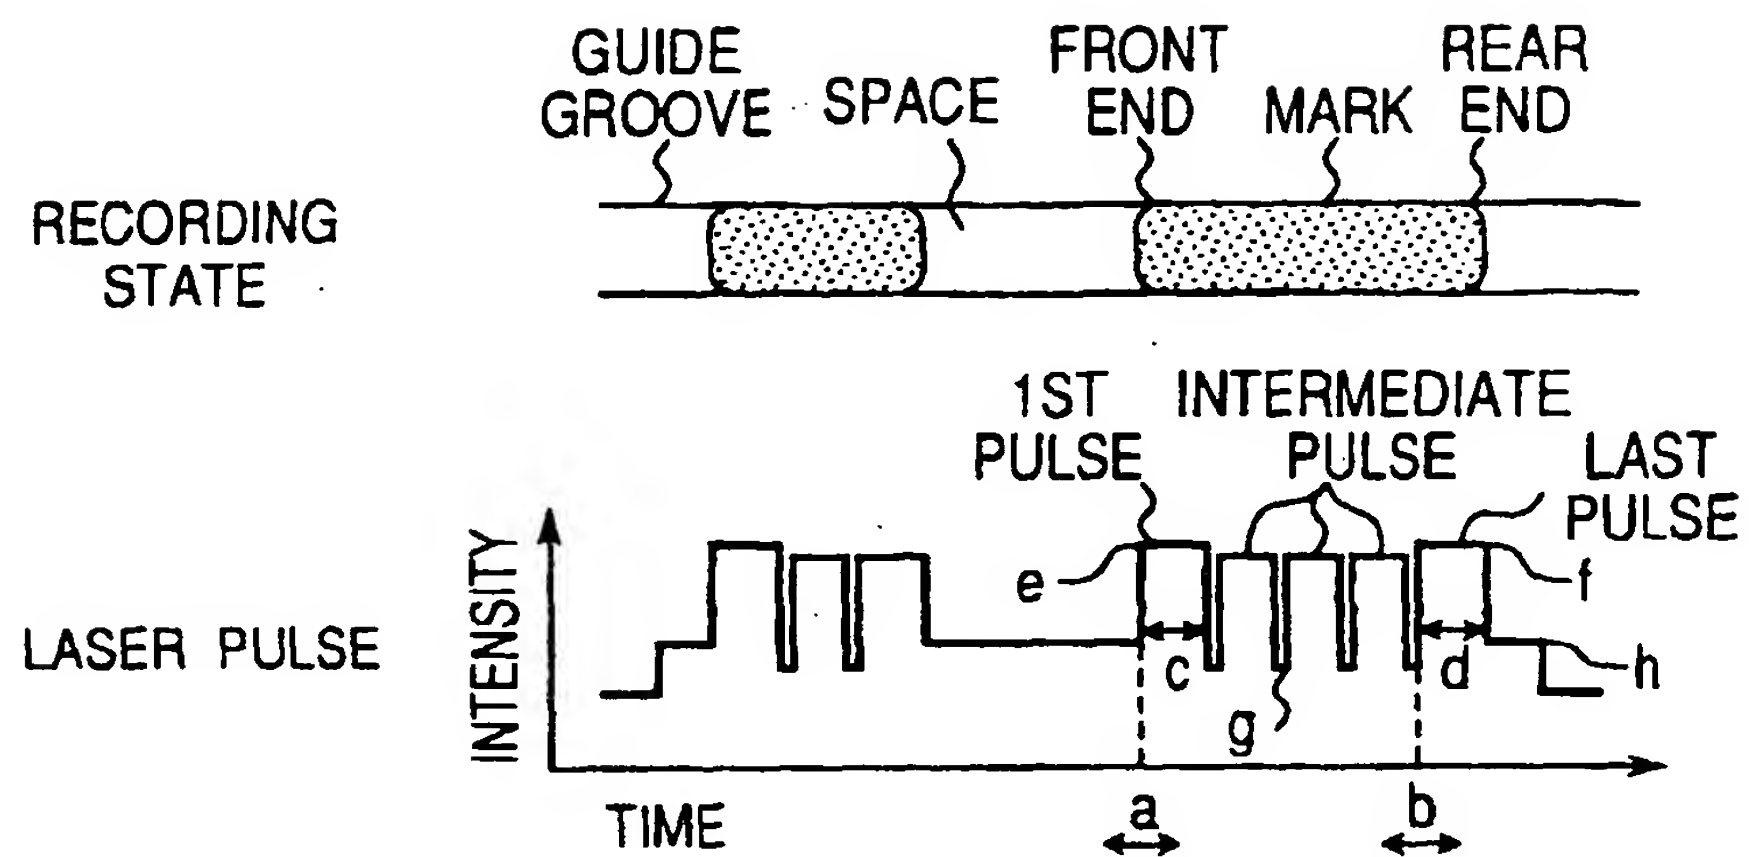
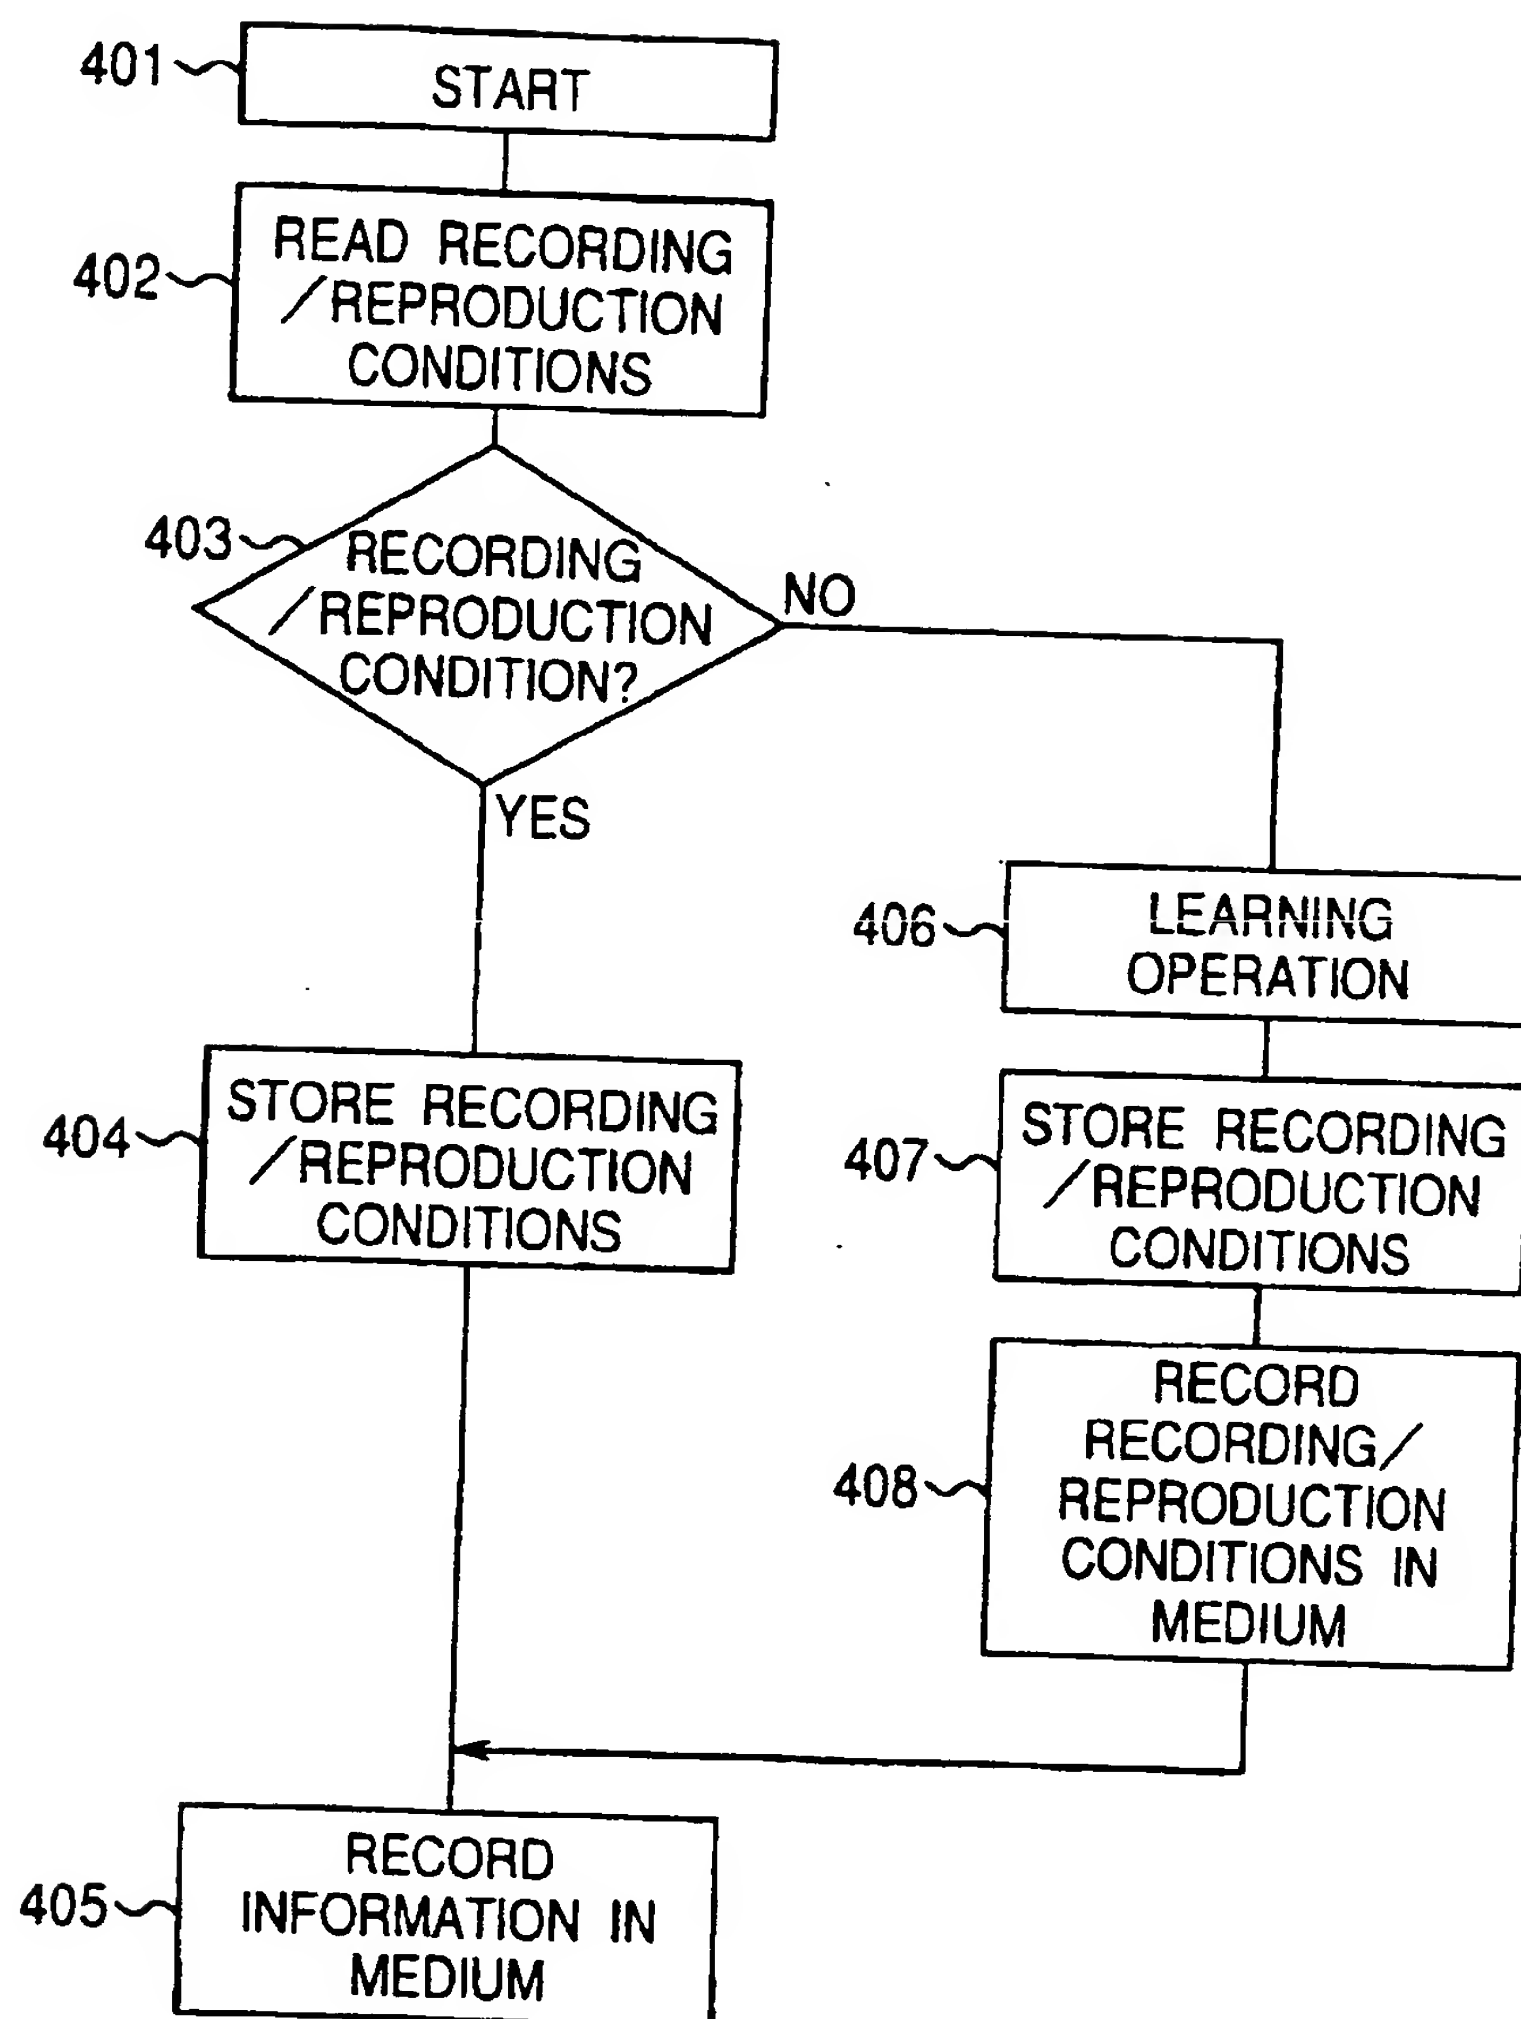


Fig.5





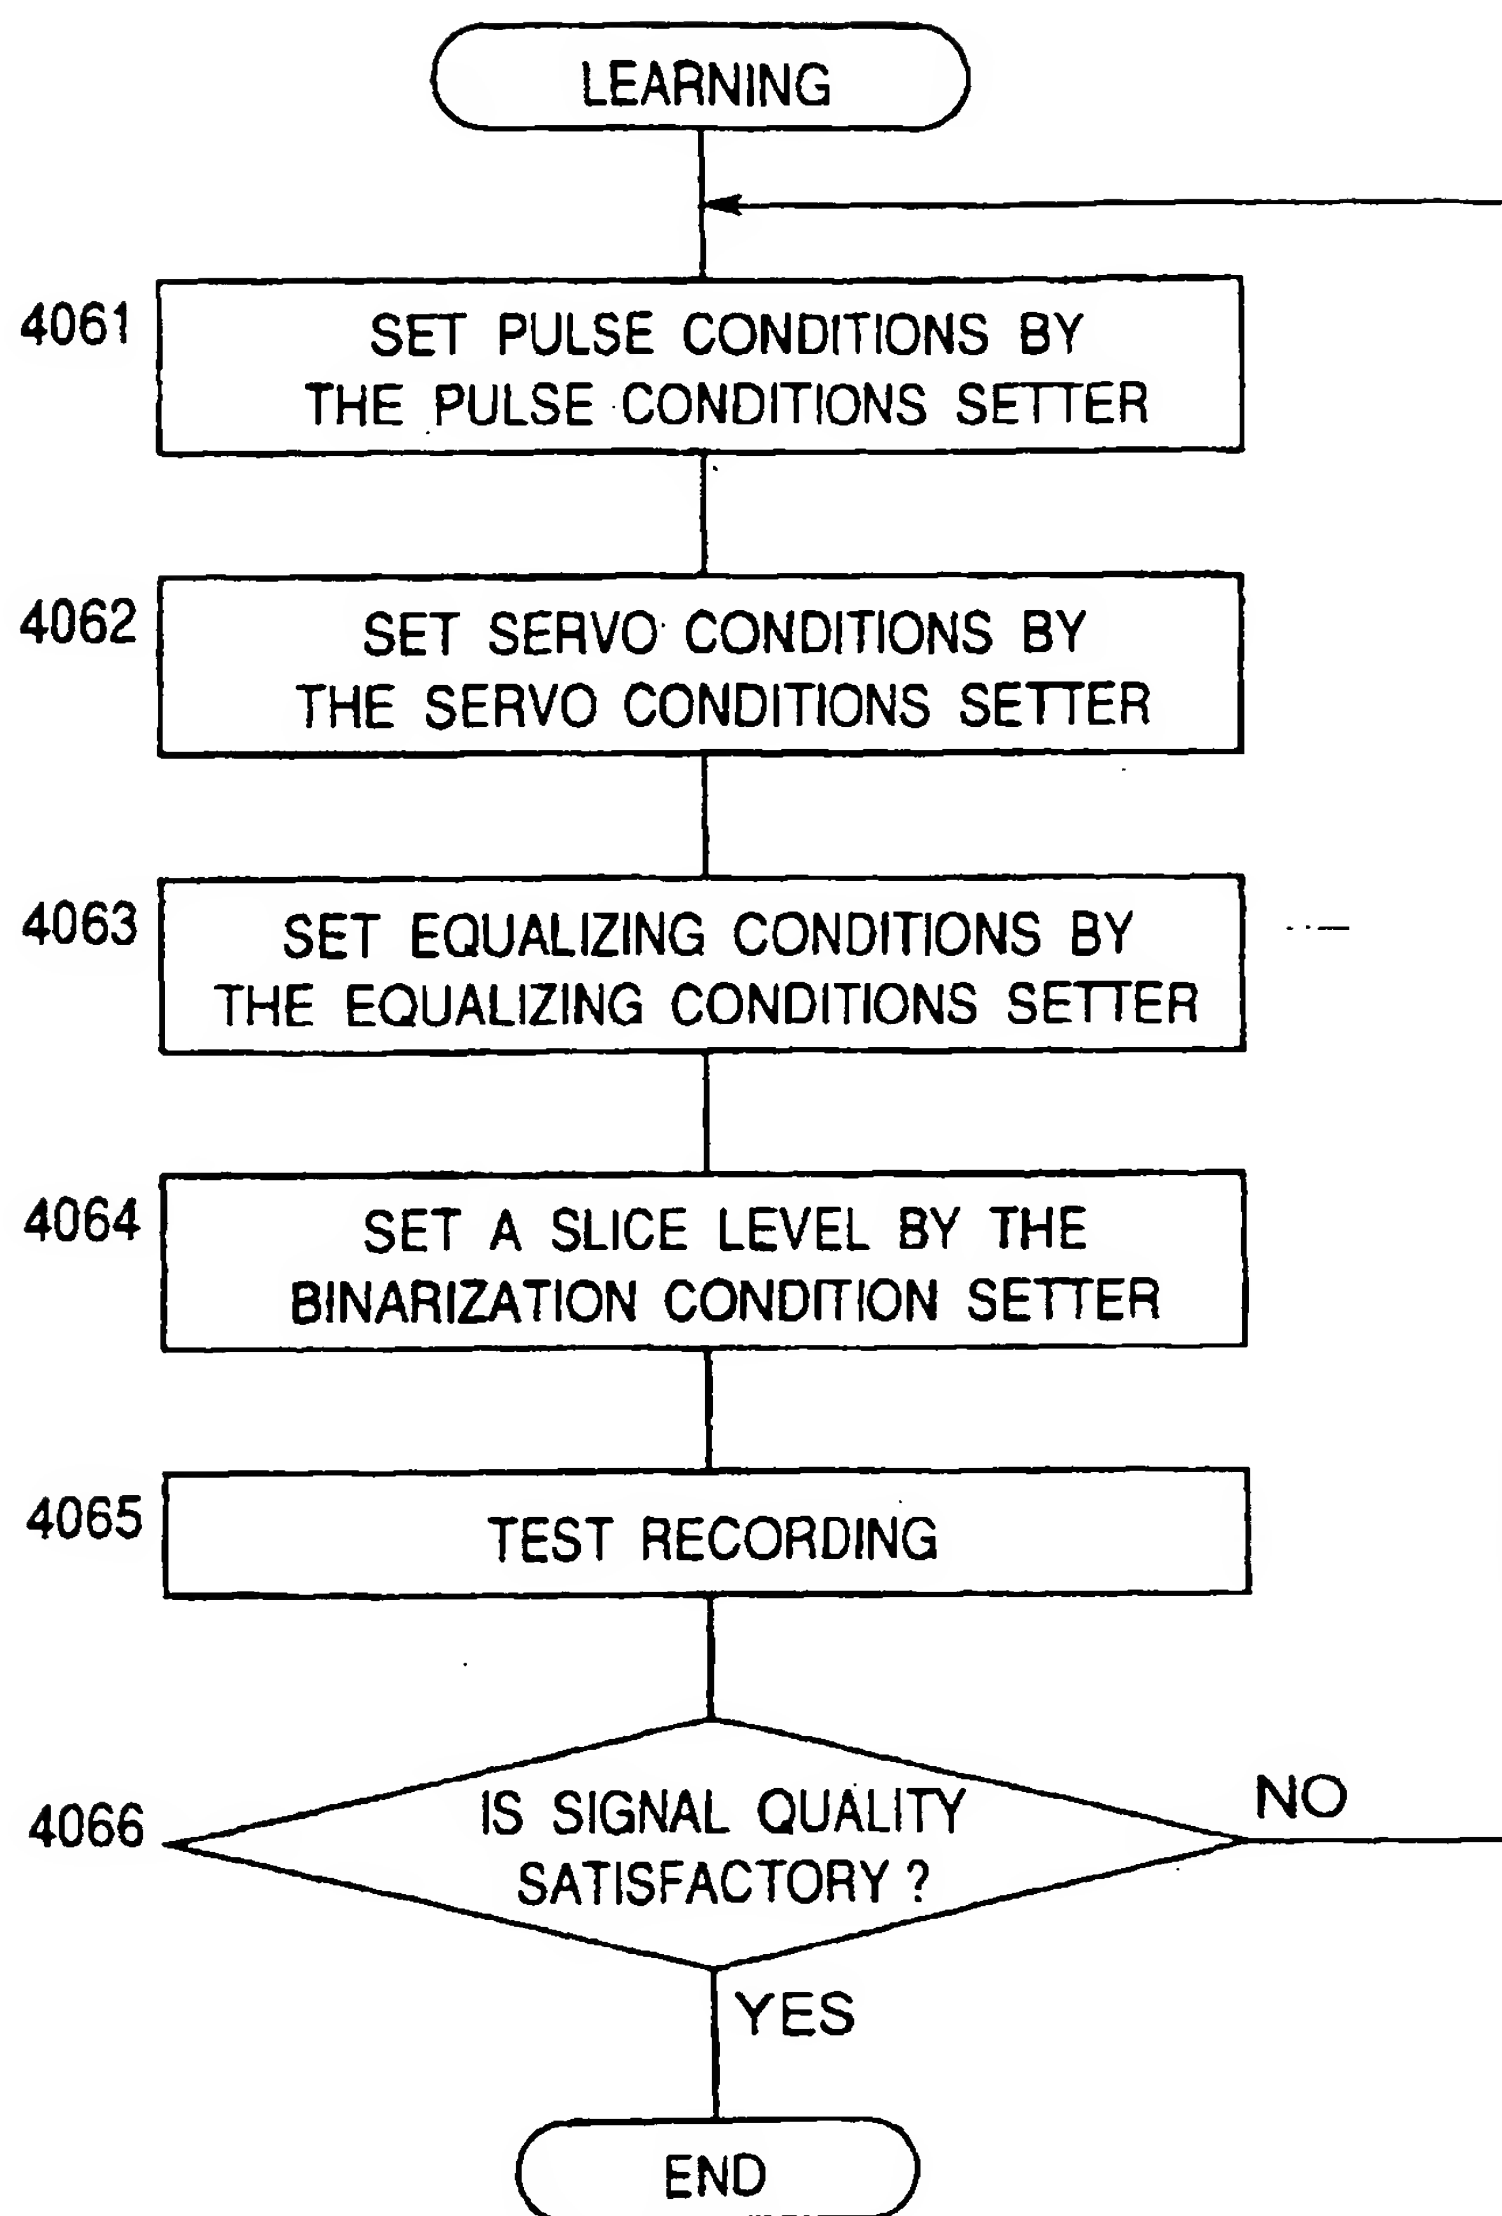
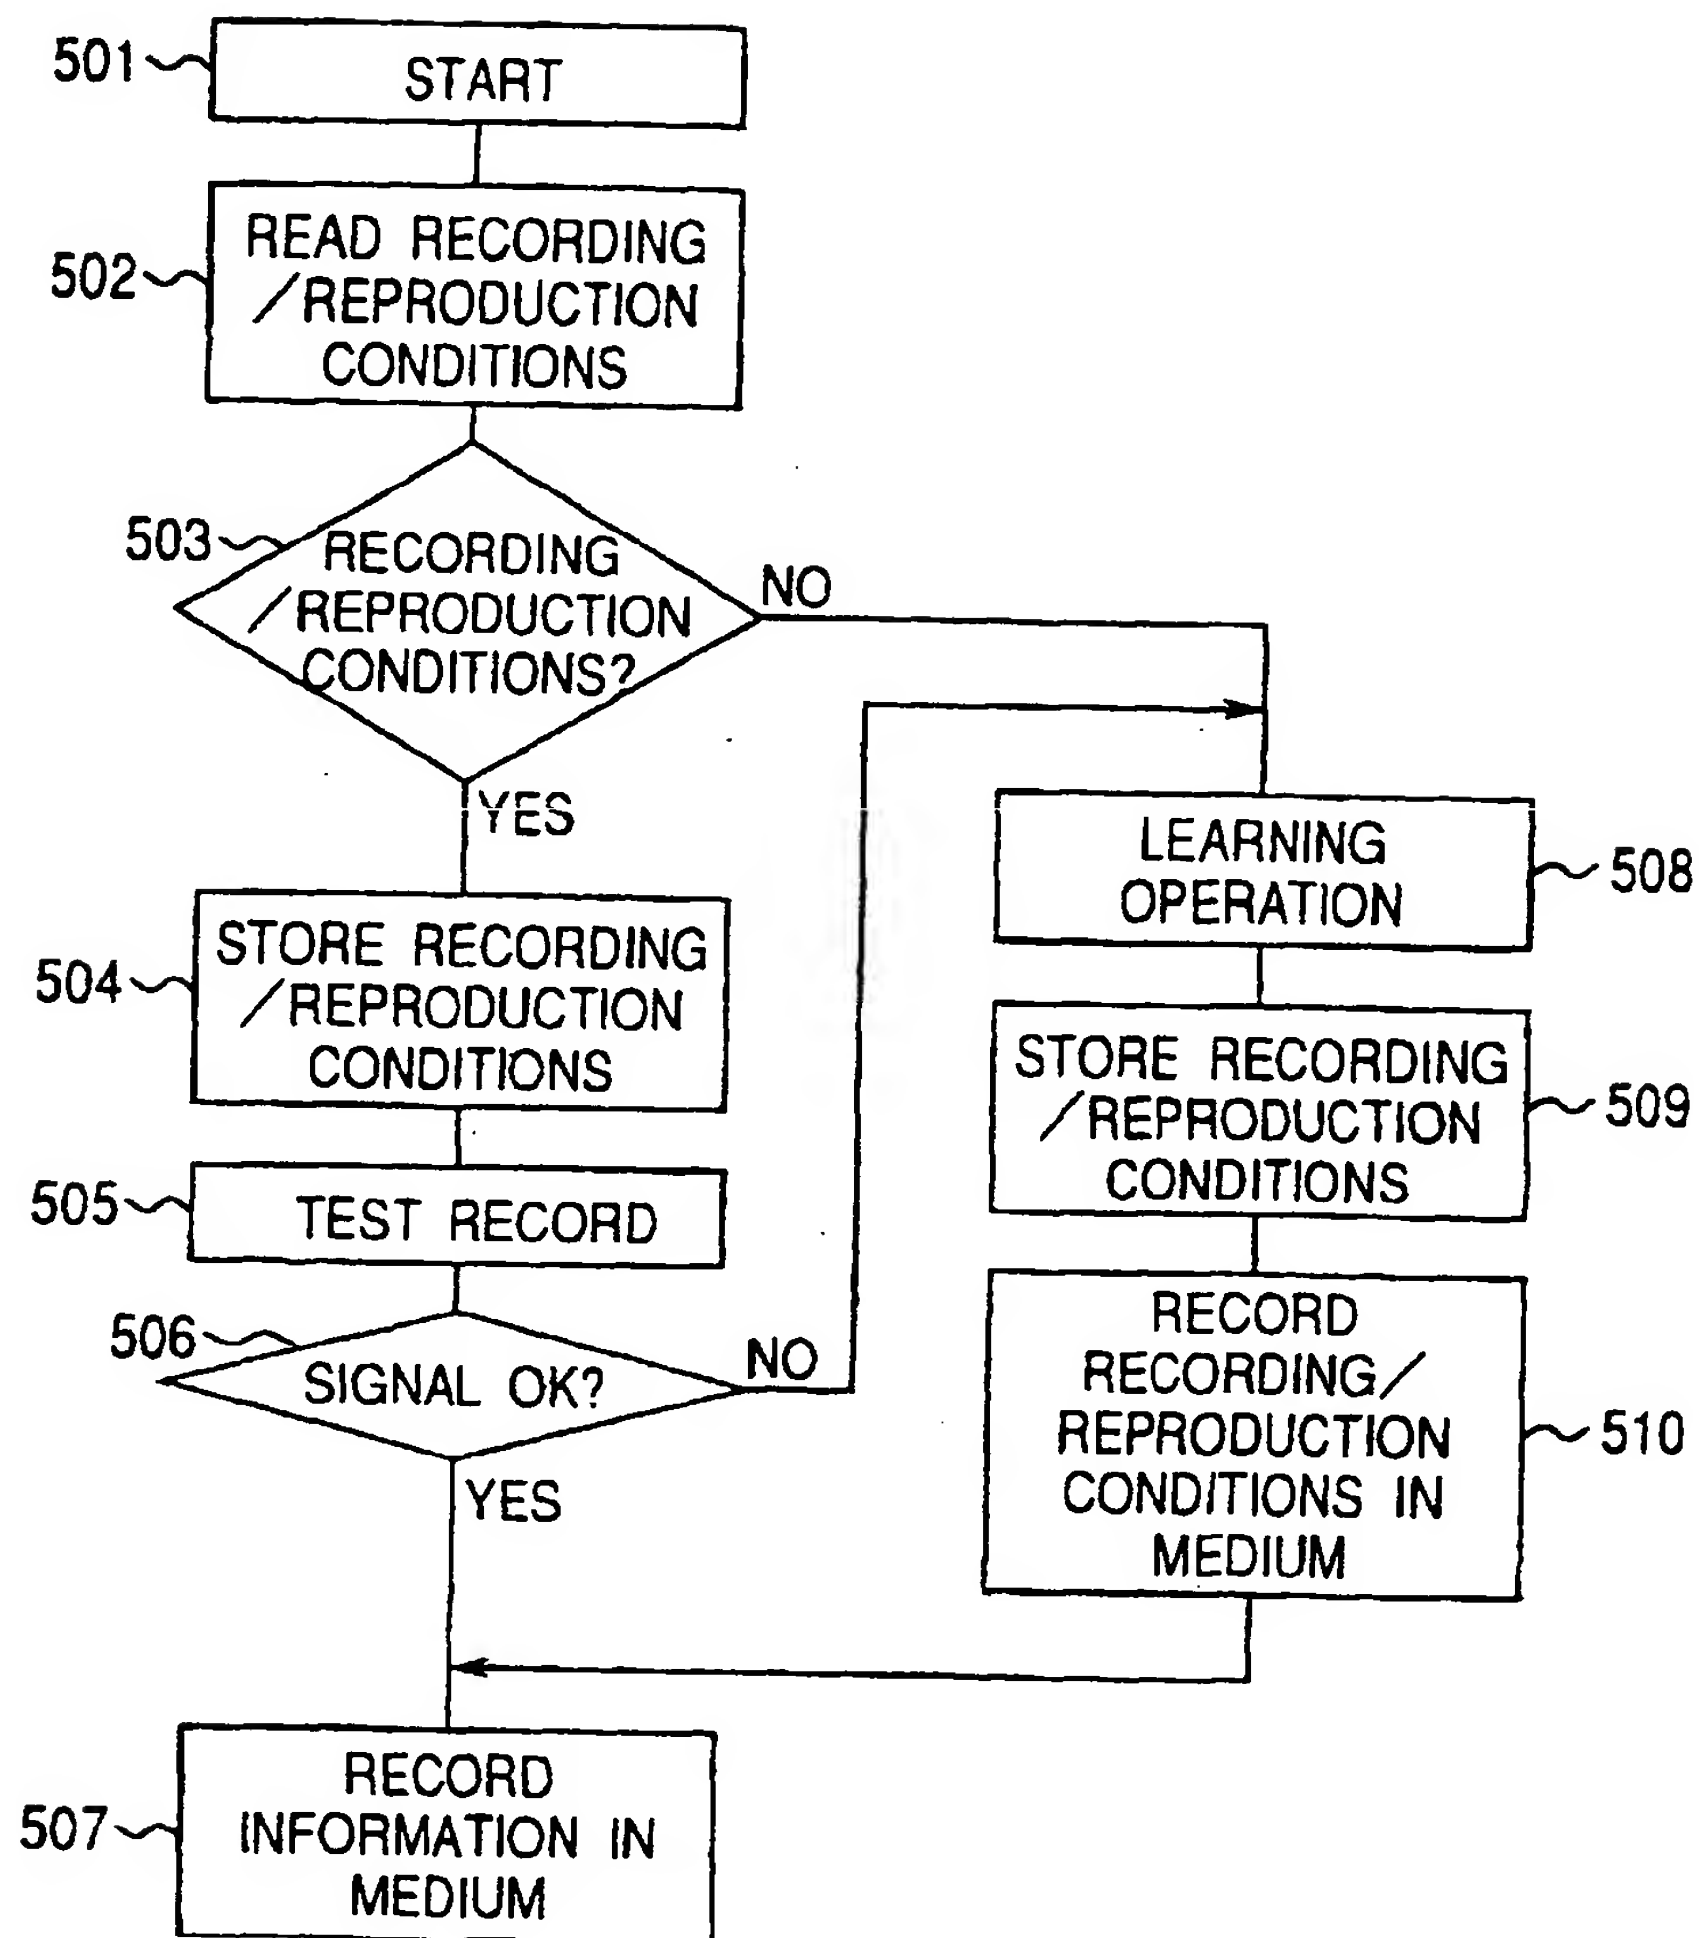
*Fig.6*

Fig. 7



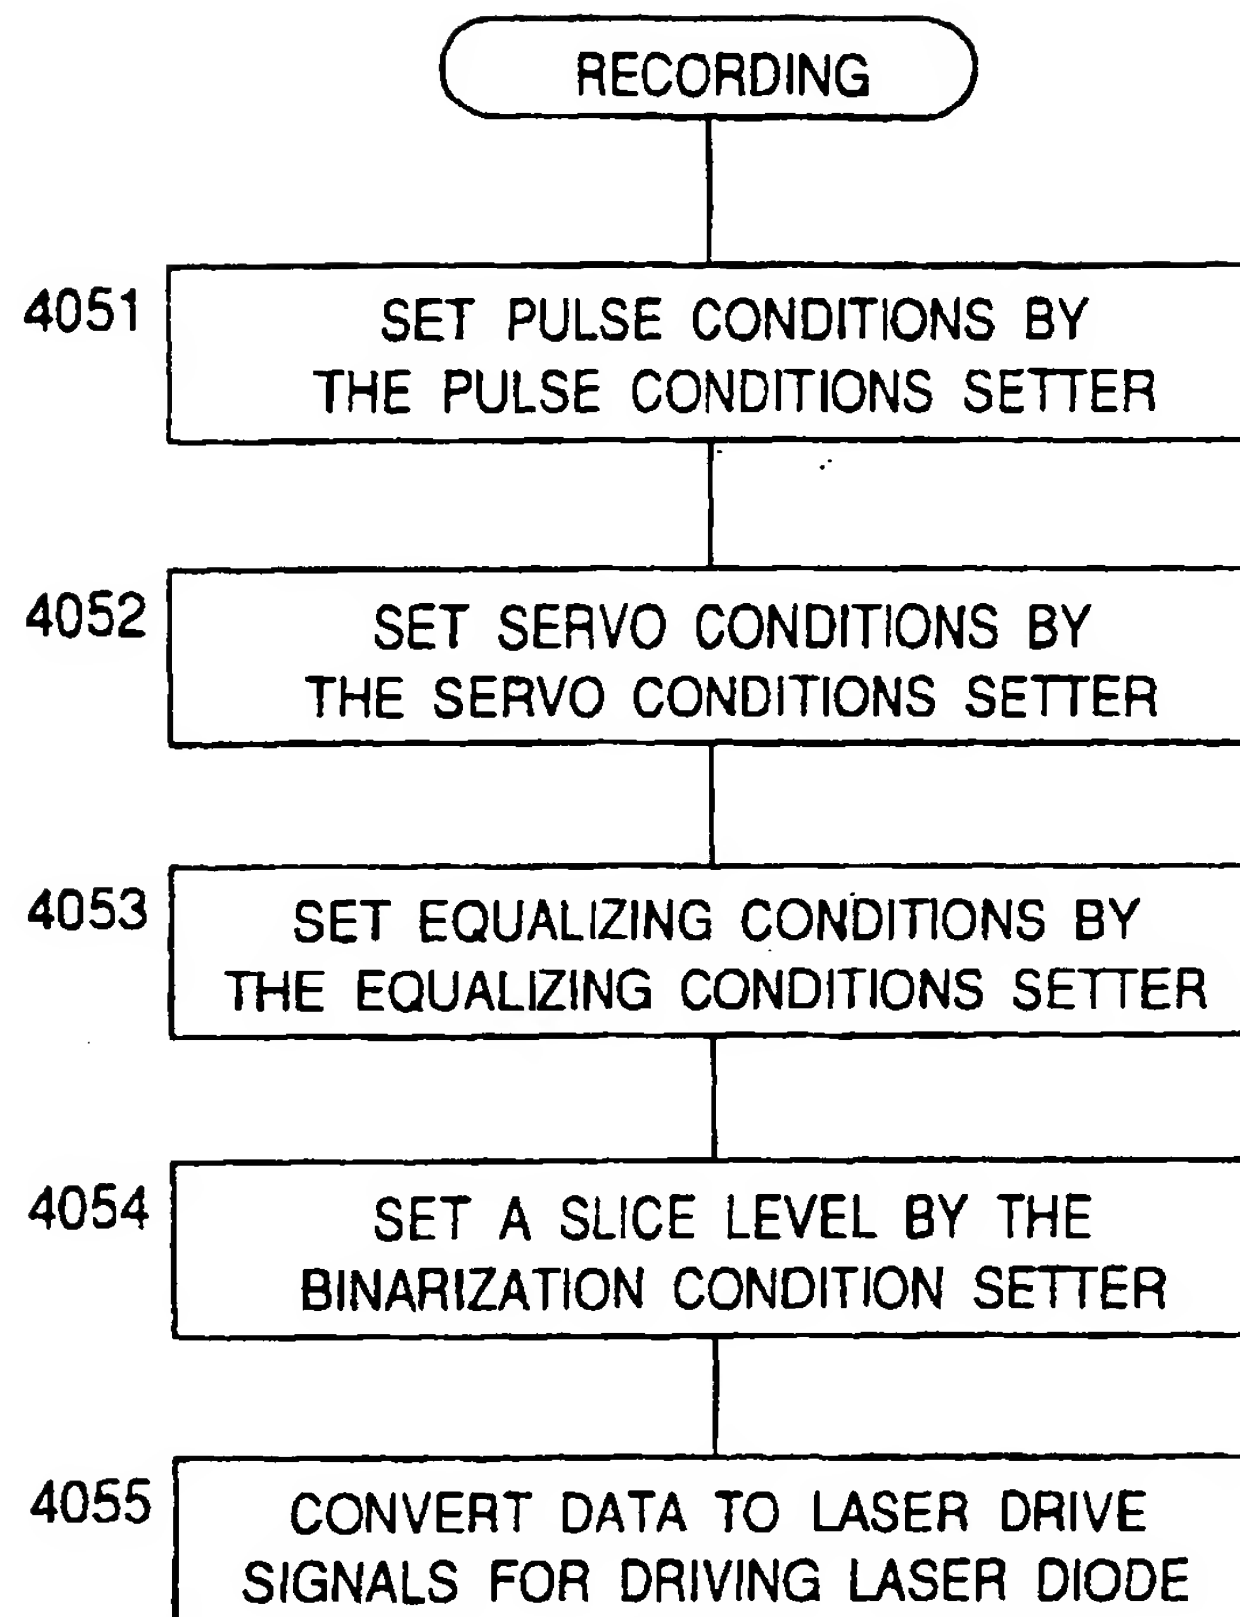
*Fig.8*

Fig. 9

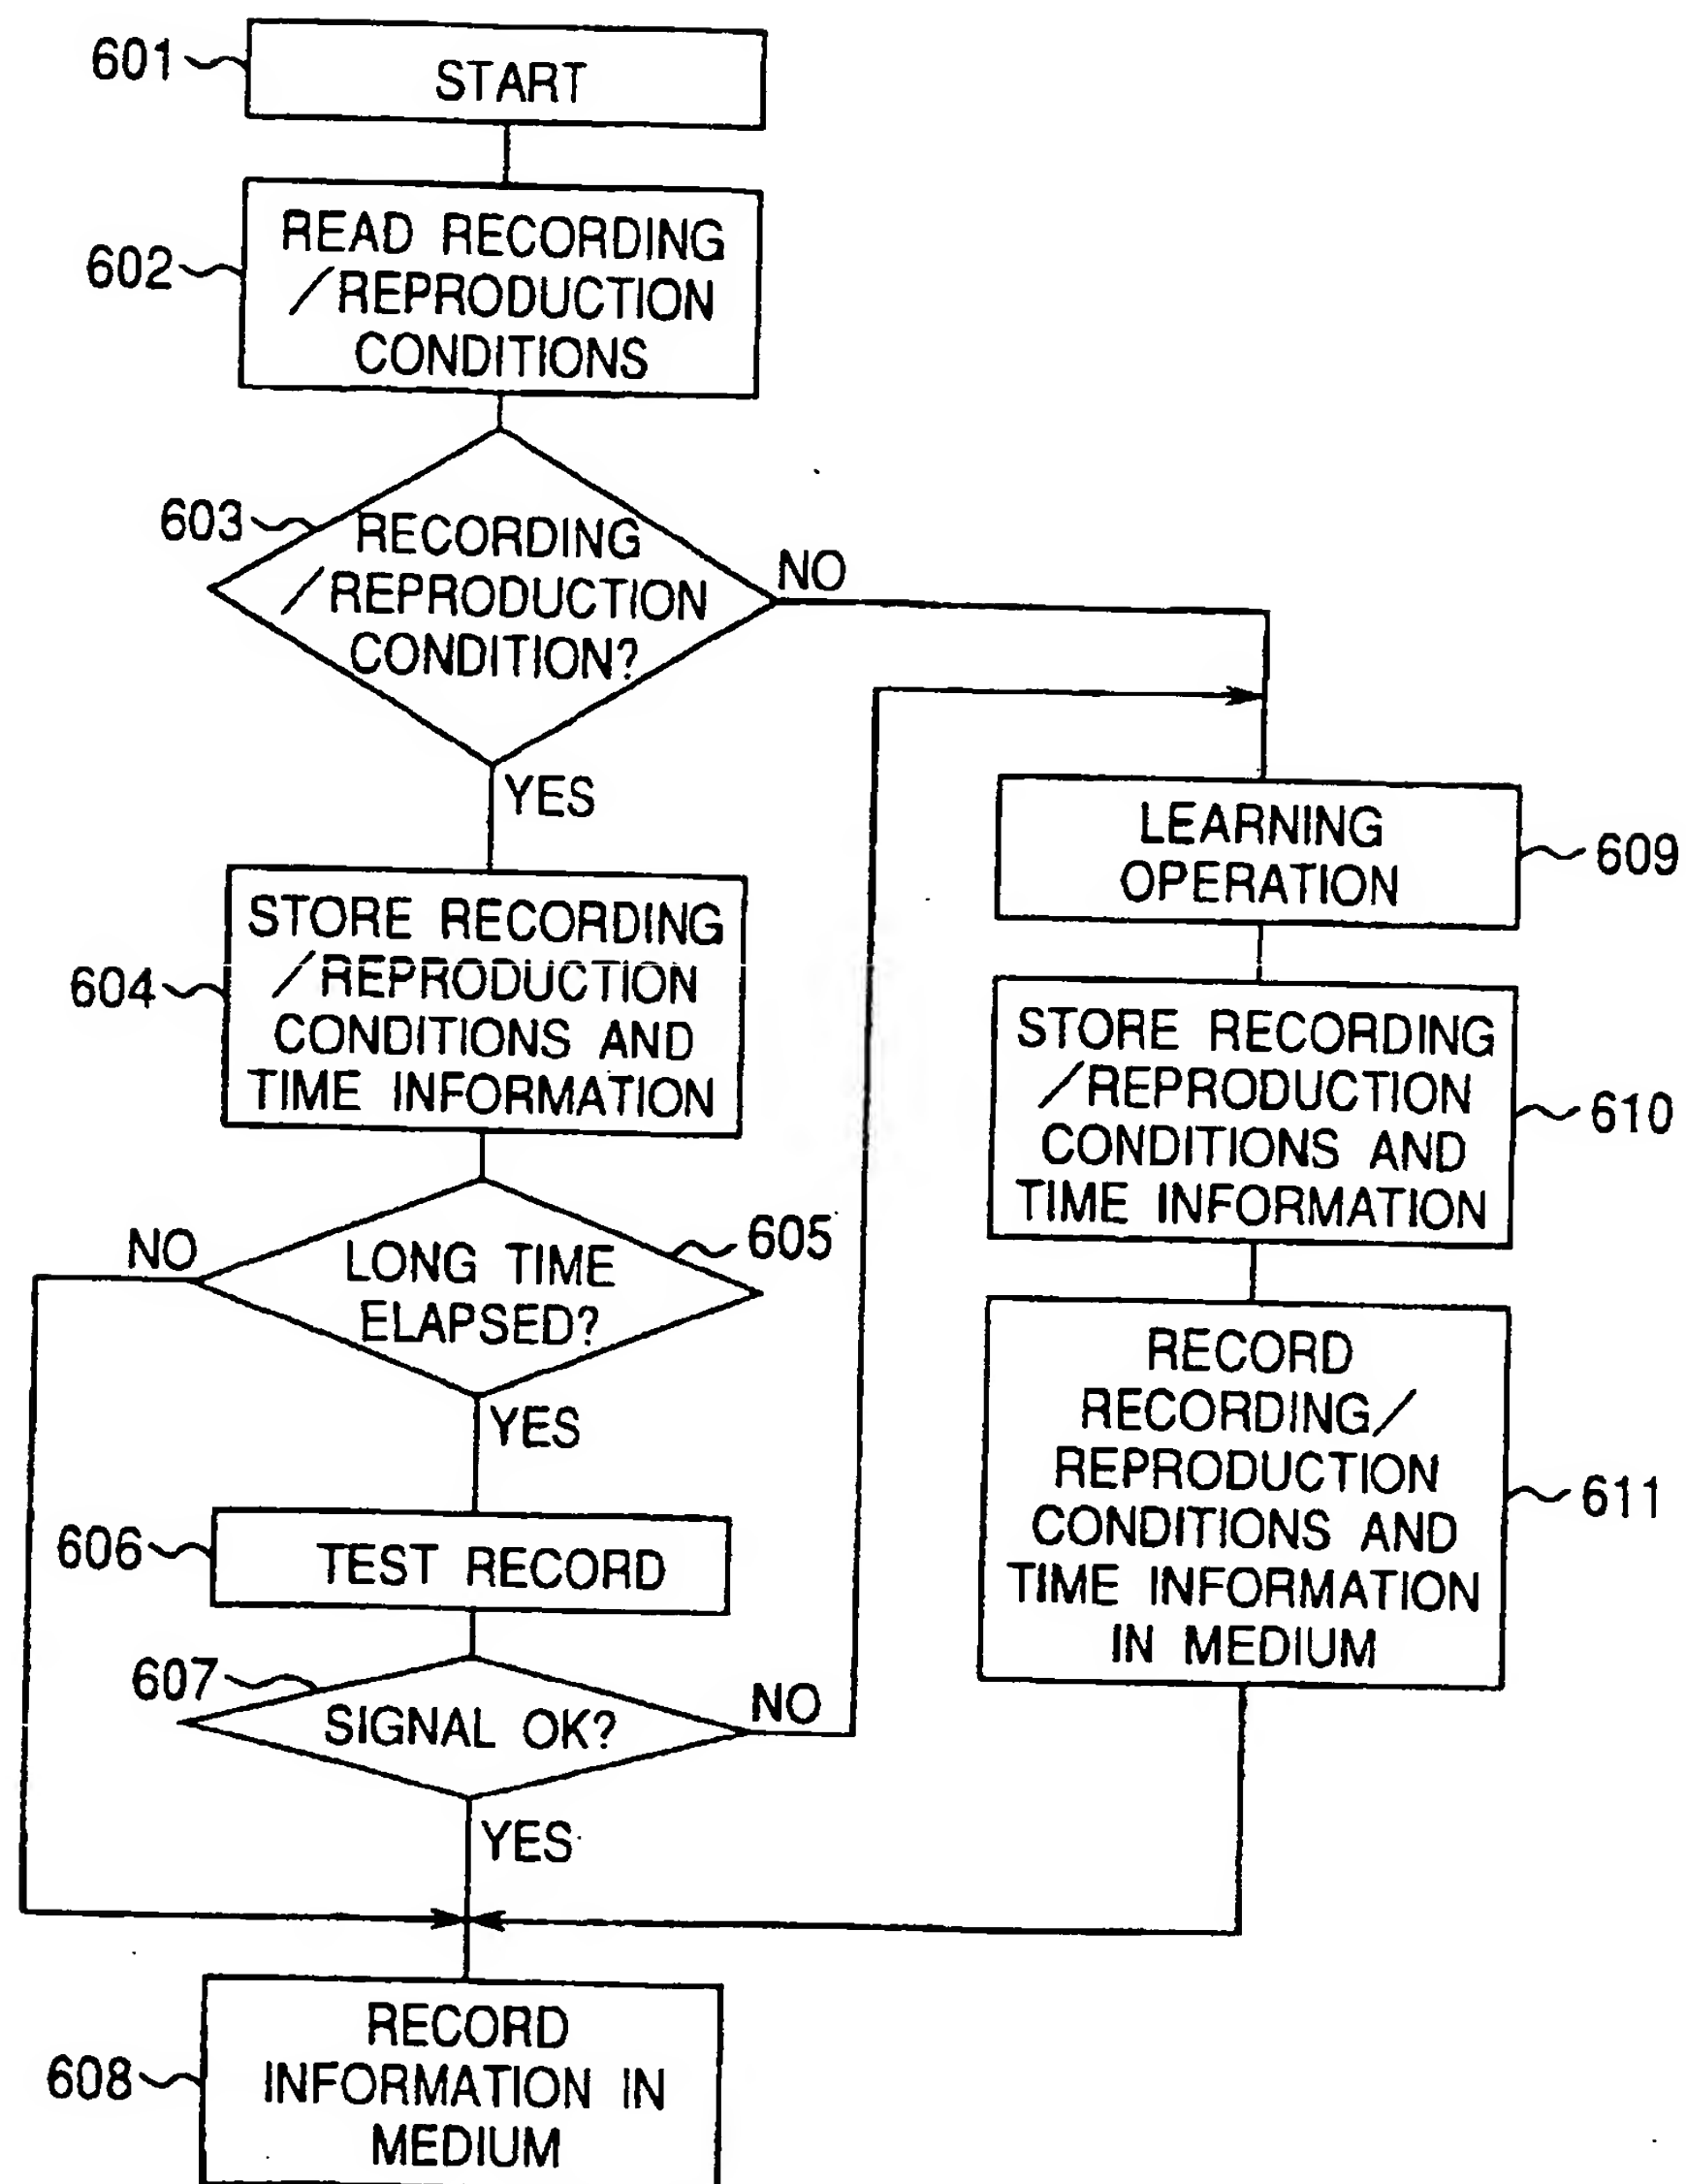




Fig. 10

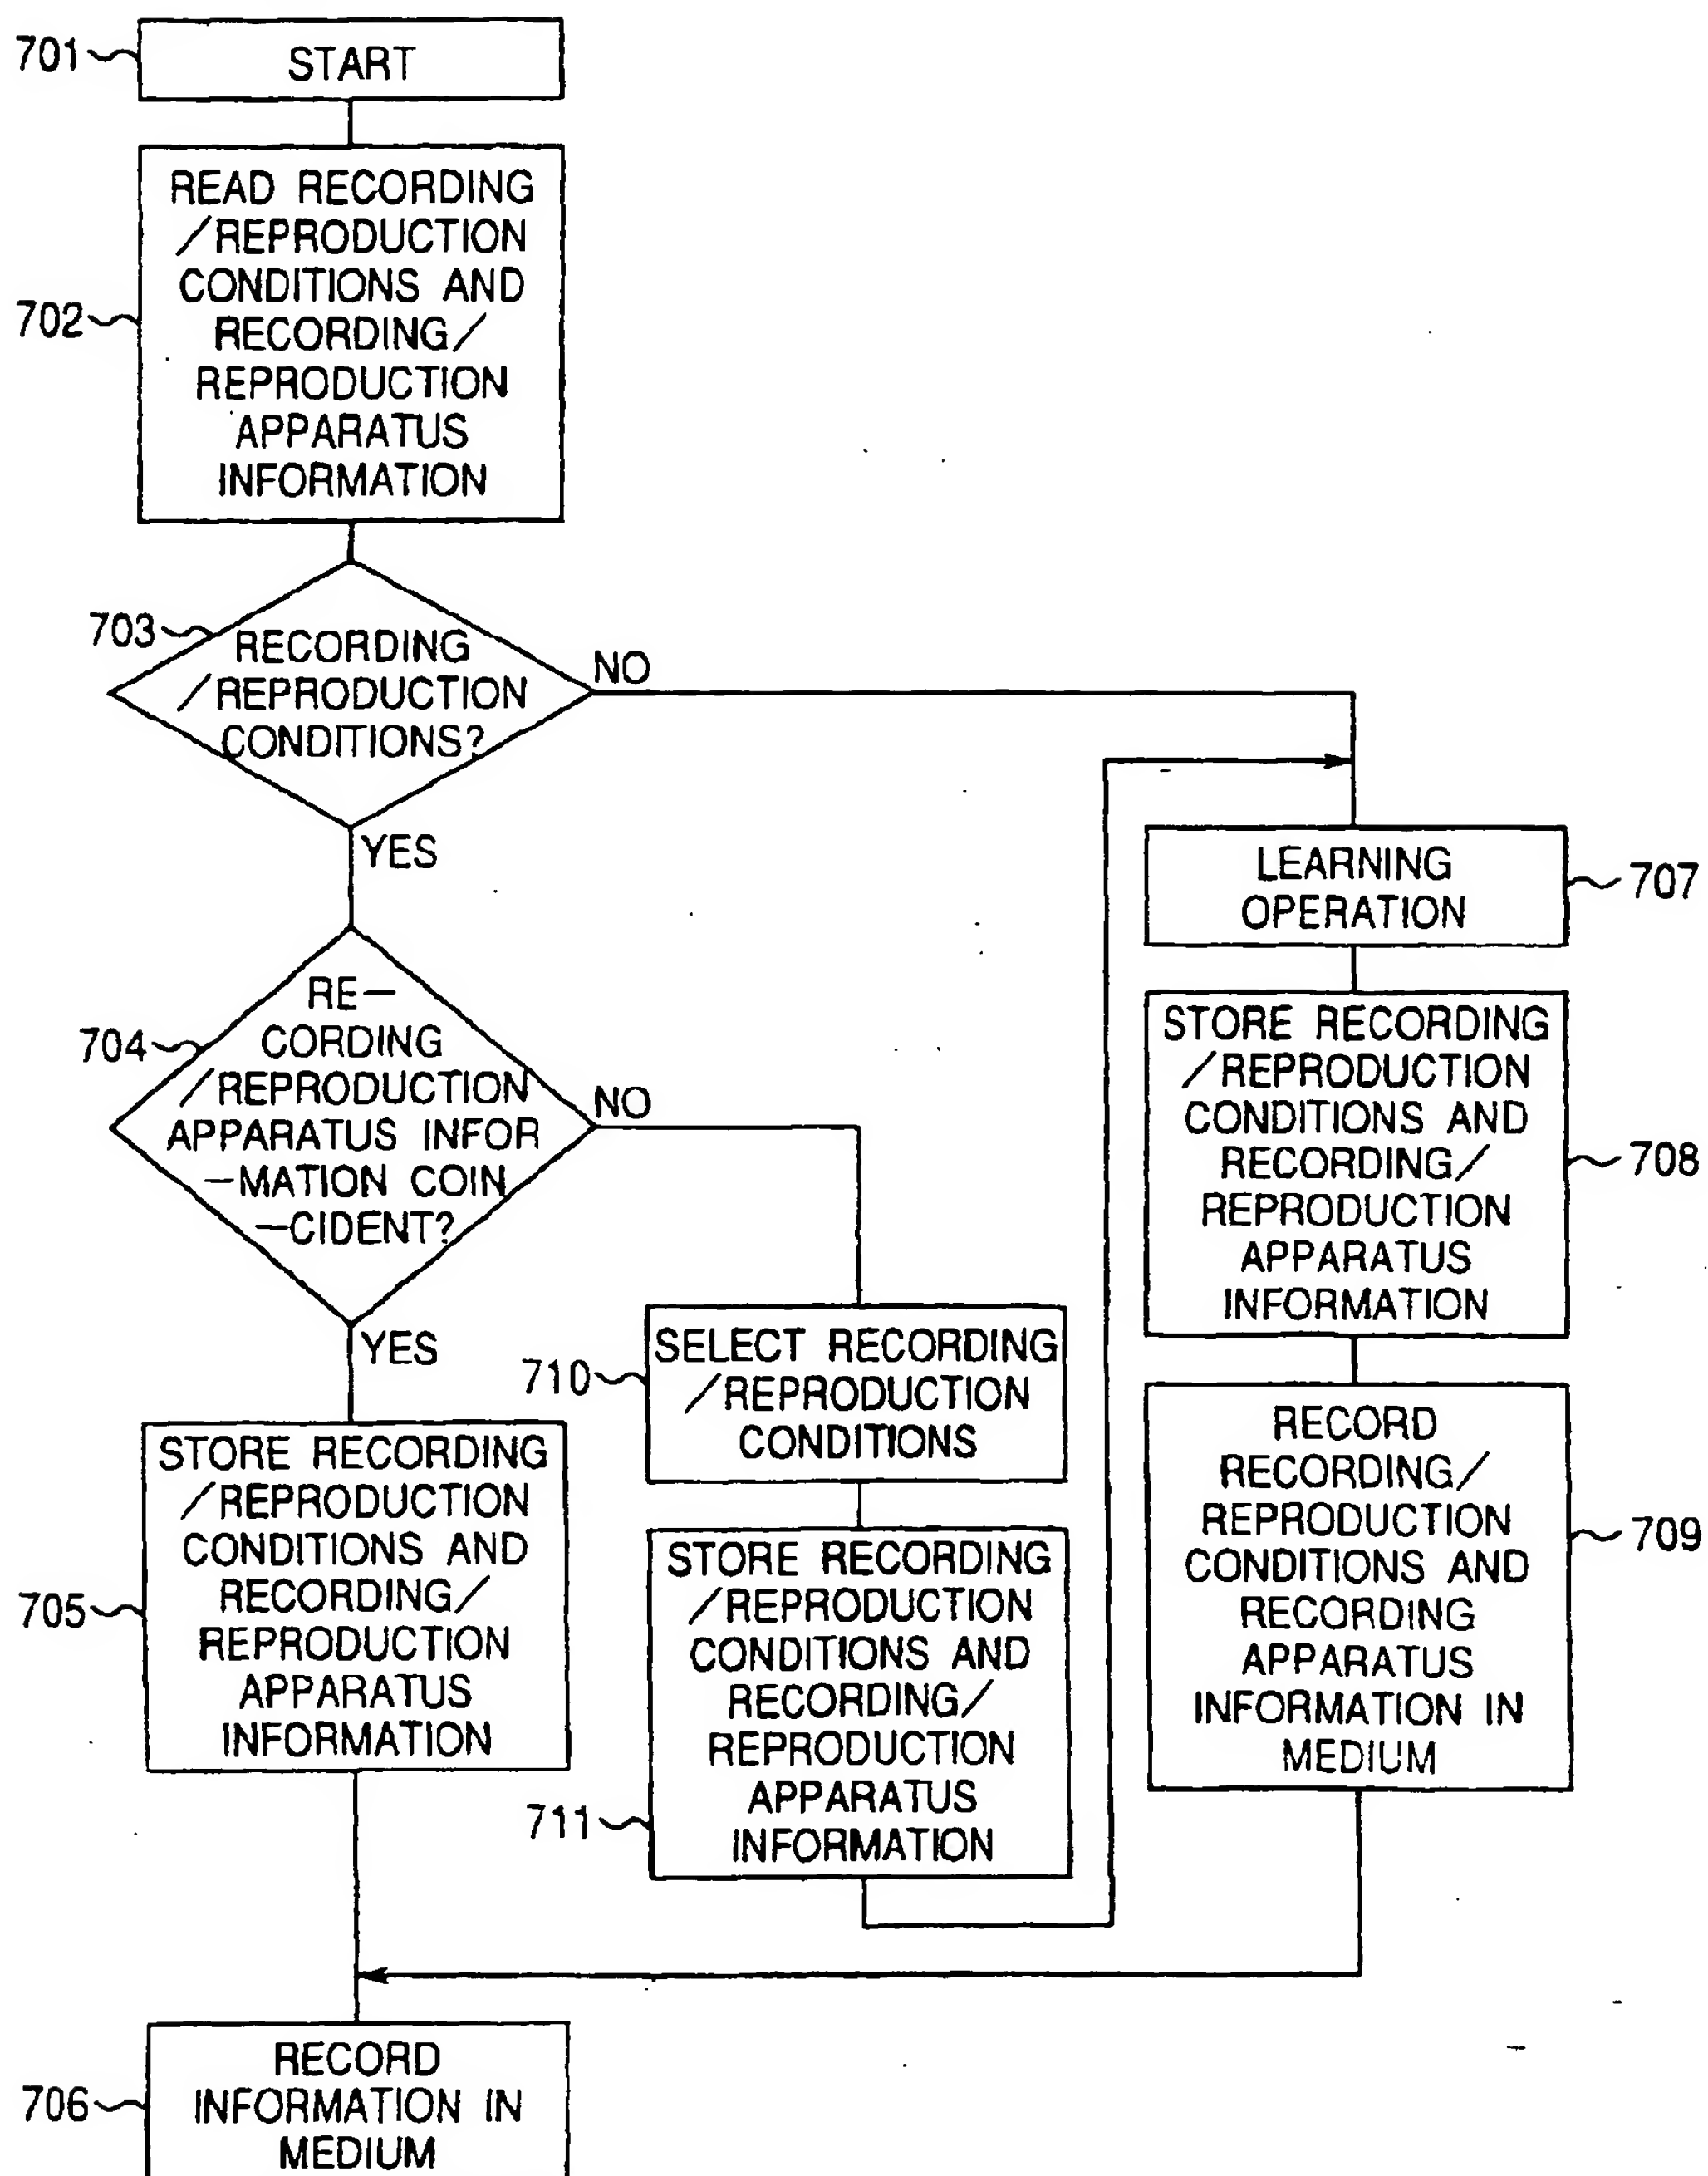


Fig. 11

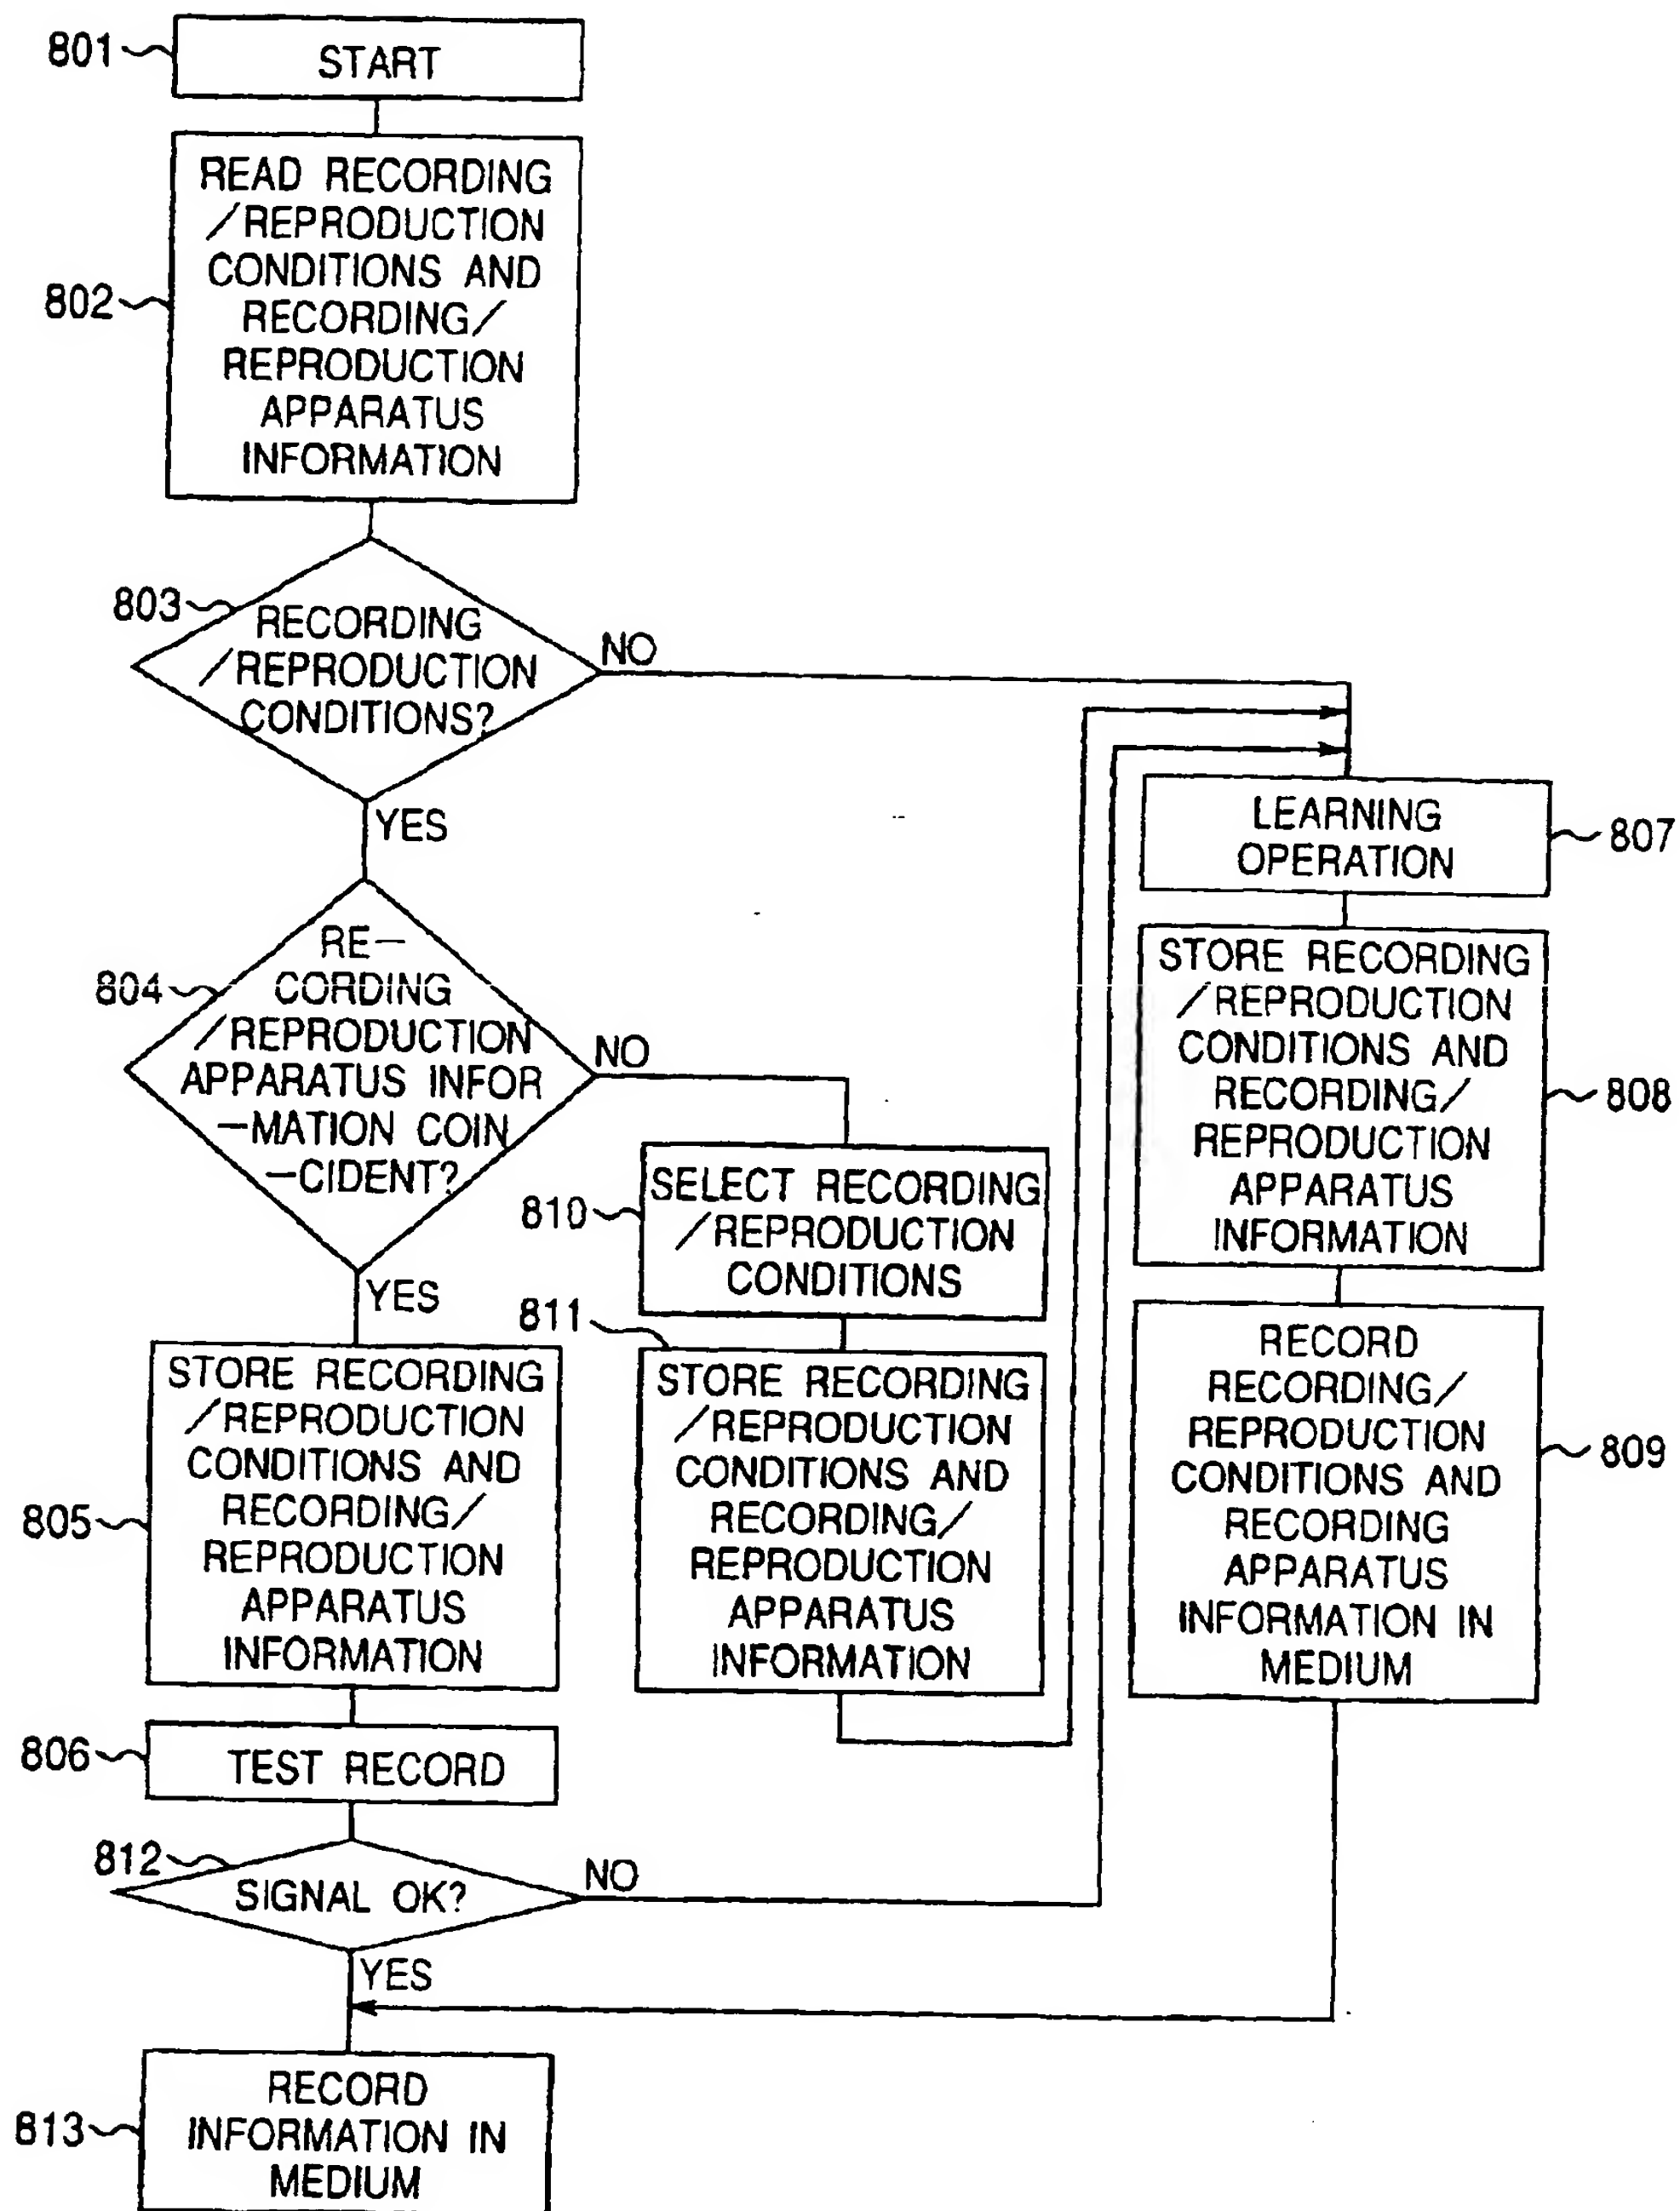
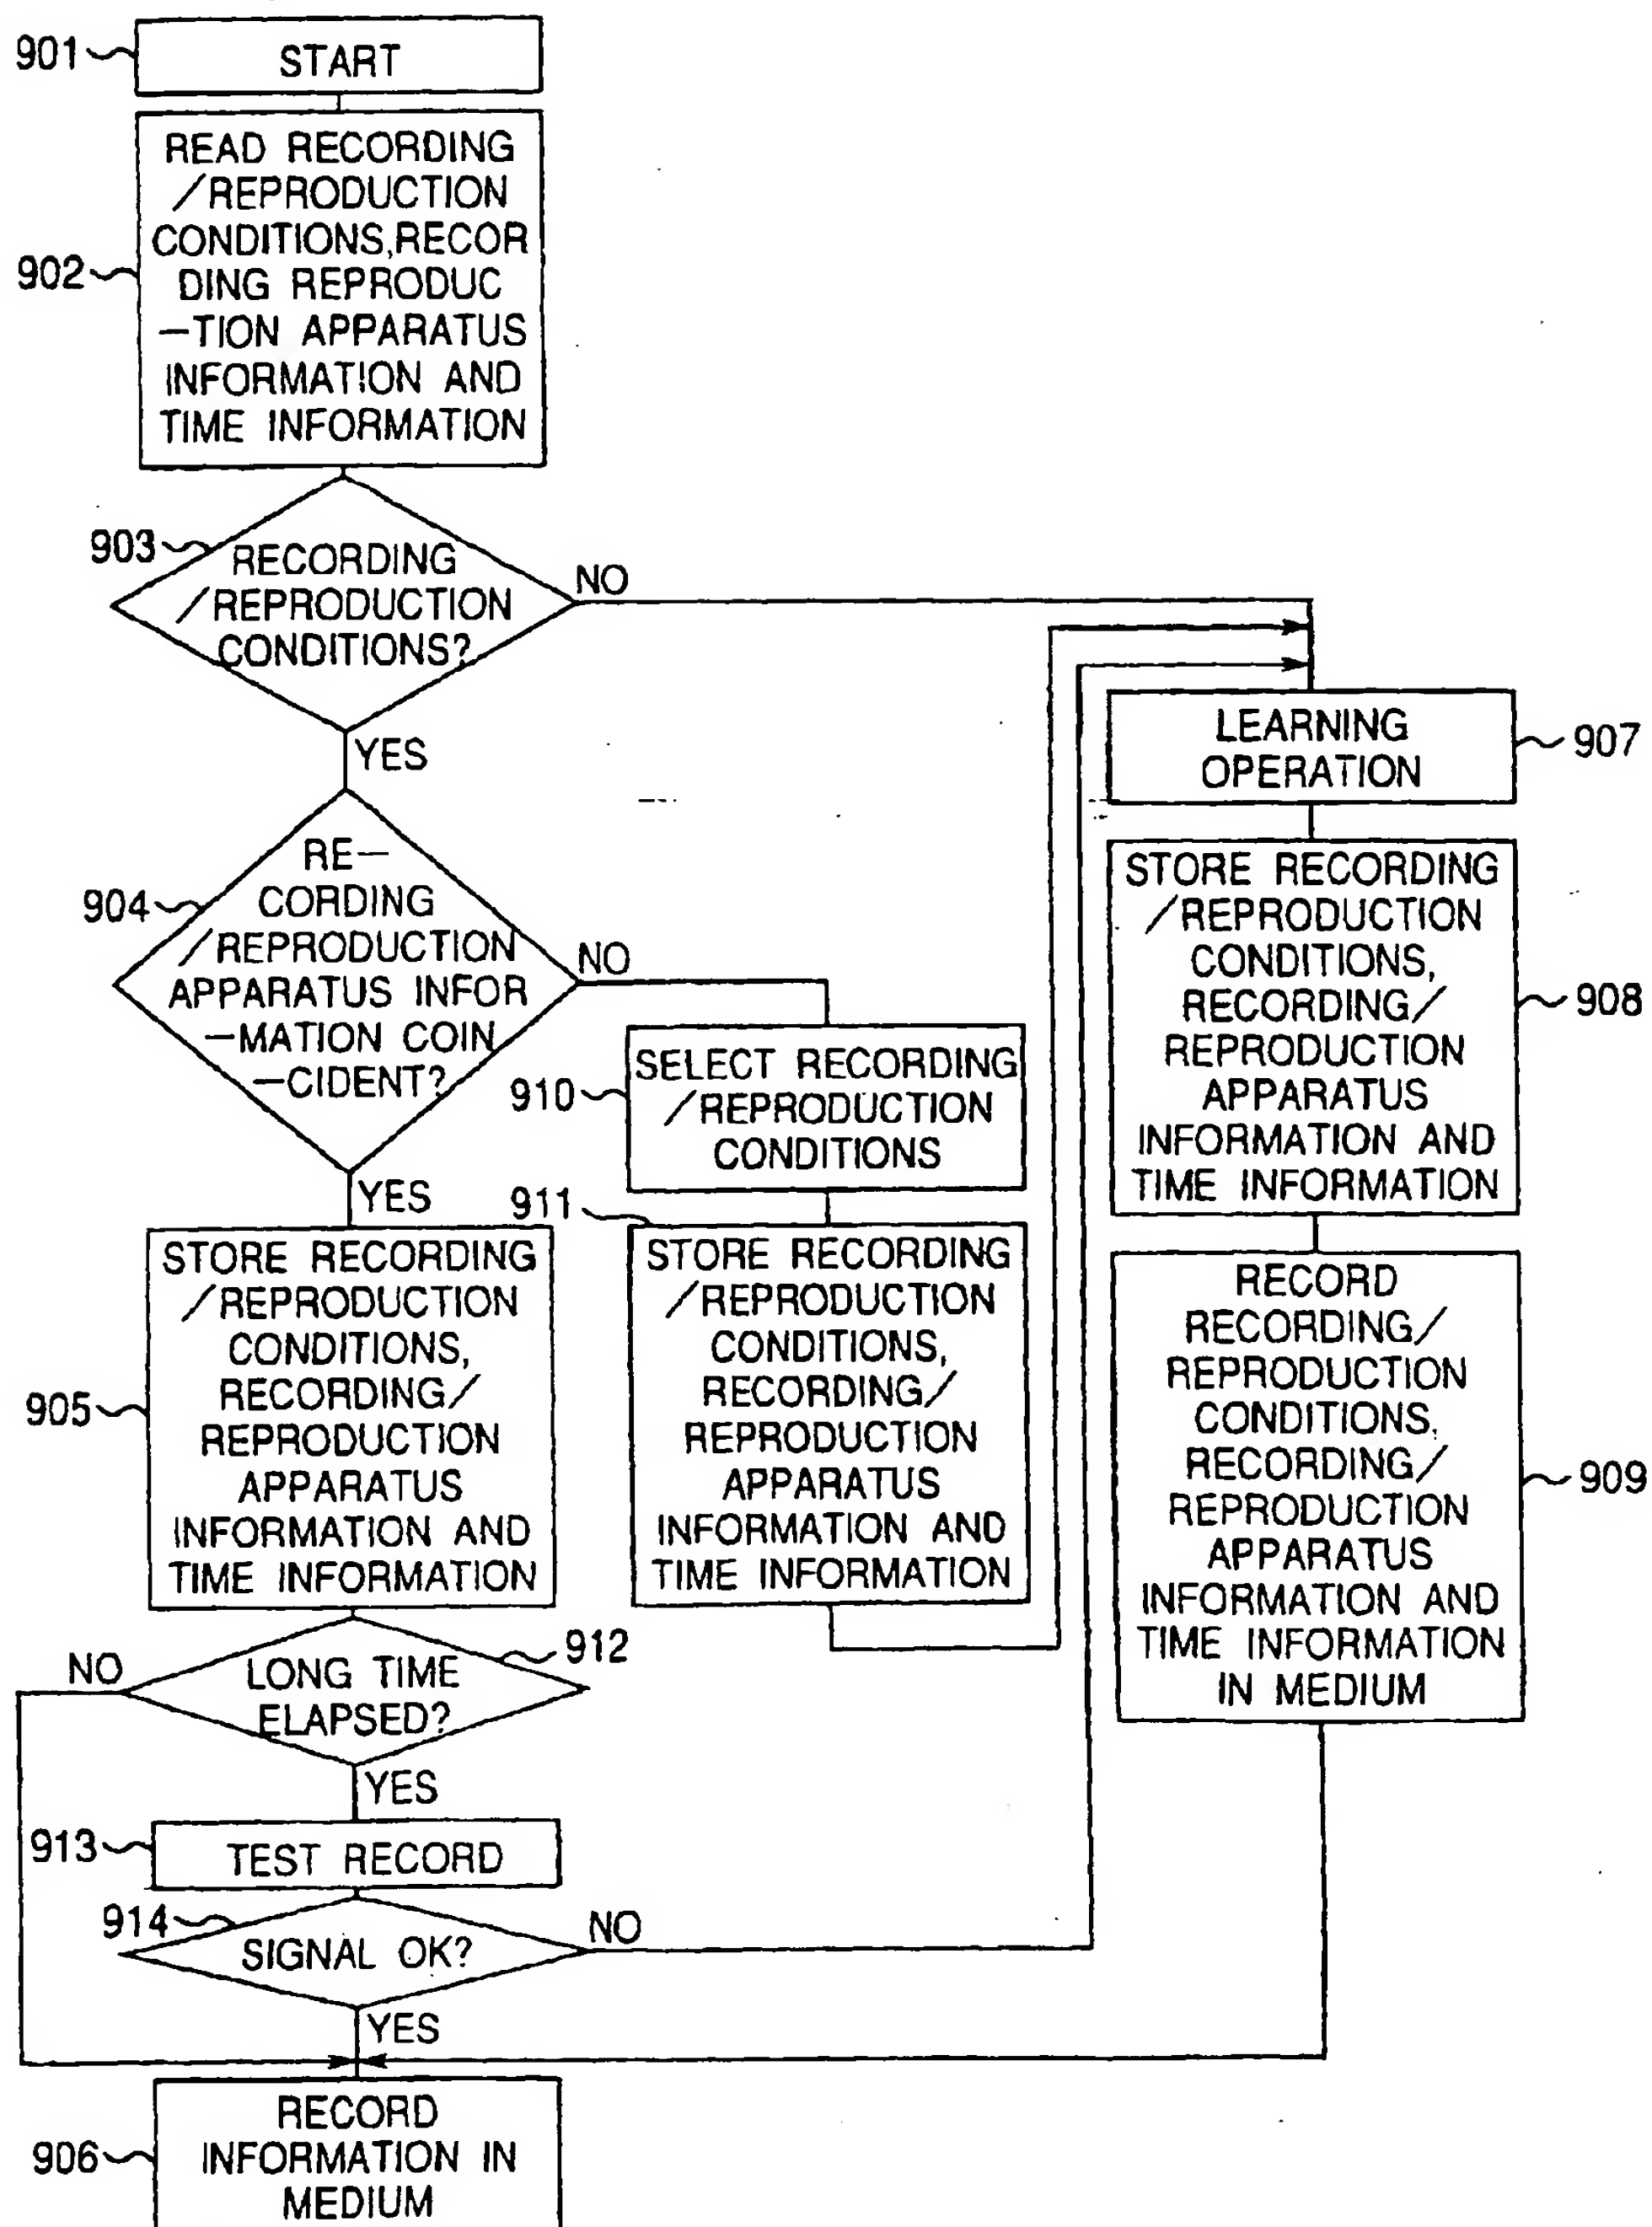


Fig. 12





European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 99 11 2502

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X A	US 5 410 527 A (ASHINUMA TAKAAKI) 25 April 1995 (1995-04-25) * abstract *  * column 3, line 24 - line 38; figures 1A-2 * * column 4, line 16 - column 7, line 33; figures 5-8C *	1,4,7,8, 13,17,20 11,15, 16,18, 21-40	G11B7/00 G11B7/125
X	EP 0 442 566 A (PHILIPS NV) 21 August 1991 (1991-08-21)  * column 3, line 33 - column 7, line 45; figures 1,2 *	1,4,5,7, 8,11,13, 15,17, 20,21, 23,24, 26,29, 33,37,39	
X A	US 5 631 887 A (HURST JR JERRY E) 20 May 1997 (1997-05-20)  * abstract *  * column 4, line 5 - column 6, line 11; figures 1-3 * * column 14, line 15 - column 20, line 11; figures 12-16 *	1,4,7,8, 11-13, 15,16, 37,38 21-36, 39,40	TECHNICAL FIELDS SEARCHED (Int.Cl.7)  G11B
X A	PATENT ABSTRACTS OF JAPAN vol. 1995, no. 07, 31 August 1995 (1995-08-31) -& JP 07 105563 A (NIKON CORP), 21 April 1995 (1995-04-21) * abstract *	1,4,7, 11-13, 15,16, 37,38  21-36,40	
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>28 October 1999</b>	Examiner <b>Pariset, N</b>
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X: particularly relevant if taken alone Y: particularly relevant if combined with another document of the same category A: technological background O: non-written disclosure P: intermediate document</p> <p>T: theory or principle underlying the invention E: earlier patent document, but published on, or after the filing date D: document cited in the application L: document cited for other reasons &amp;: member of the same patent family, corresponding document</p>			

EPO FORM 1503 03/82 (P04C01)





European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 99 11 2502

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (In I.C.I.7)
P,X	PATENT ABSTRACTS OF JAPAN vol. 1999, no. 05, 31 May 1999 (1999-05-31) -& JP 11 039687 A (NIKON CORP), 12 February 1999 (1999-02-12)	1,4,7,8, 13	
A	* abstract *	21,37	
X	--- PATENT ABSTRACTS OF JAPAN vol. 013, no. 064 (P-827), 14 February 1989 (1989-02-14) -& JP 63 251938 A (SEIKO EPSON CORP), 19 October 1988 (1988-10-19)	1,4,7,8, 13	
A	* abstract; figure 1 *	21,37	
A	US 5 706 271 A (HASHIMOTO HIROKUNI) 6 January 1998 (1998-01-06)  * abstract; figures 2-5 * * column 1, line 52 - column 2, line 7 * * column 5, line 9 - column 6, line 40 * -----	1,8-10, 13,17, 21,37	TECHNICAL FIELDS SEARCHED (Int.Cl.7)
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>28 October 1999</b>	Examiner <b>Pariset, N</b>
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 11 2502

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

28-10-1999

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5410527 A	25-04-1995	JP 61260438 A	18-11-1986
		JP 61260439 A	18-11-1986
		JP 2066091 C	24-06-1996
		JP 7101511 B	01-11-1995
		JP 61294649 A	25-12-1986
EP 0442566 A	21-08-1991	NL 9000327 A	02-09-1991
		DE 69115304 D	25-01-1996
		DE 69115304 T	11-07-1996
		HK 109496 A	05-07-1996
		JP 4214208 A	05-08-1992
		US 5072435 A	10-12-1991
US 5631887 A	20-05-1997	NONE	
JP 07105563 A	21-04-1995	NONE	
JP 11039687 A	12-02-1999	NONE	
JP 63251938 A	19-10-1988	NONE	
US 5706271 A	06-01-1998	JP 8329468 A	13-12-1996

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82